

Installations for WB-9012G



✚ Installations for WB-9012G

- Take out **Adjustable Feet**
- Fasten **Adjustable Feet** to **BSP1** and **BSP2**



For BSP1 and Bsp2





✚ Installations for WB-9012G

- Take out **Adjustable Feet**
- Fasten **Adjustable Feet** to **SP3** and **SP6**




🔧 Installations for WB-9012G

- Take out the number: **BSP2 . SP4**
- Join **SP4** to **BSP2** with:

Hardware A				
Part name	Description	Photos	Q'ty	Grainger Model #
Hex Screw	5/16" x 3"		8	1YU39
Flat Washer	5/16" x OD23 x 2T		16	*1JY31
Nylon Hex Nut	5/16"		8	3XTK3

(*) Hardware item at similar spec available locally.

Installations for WB-9012G

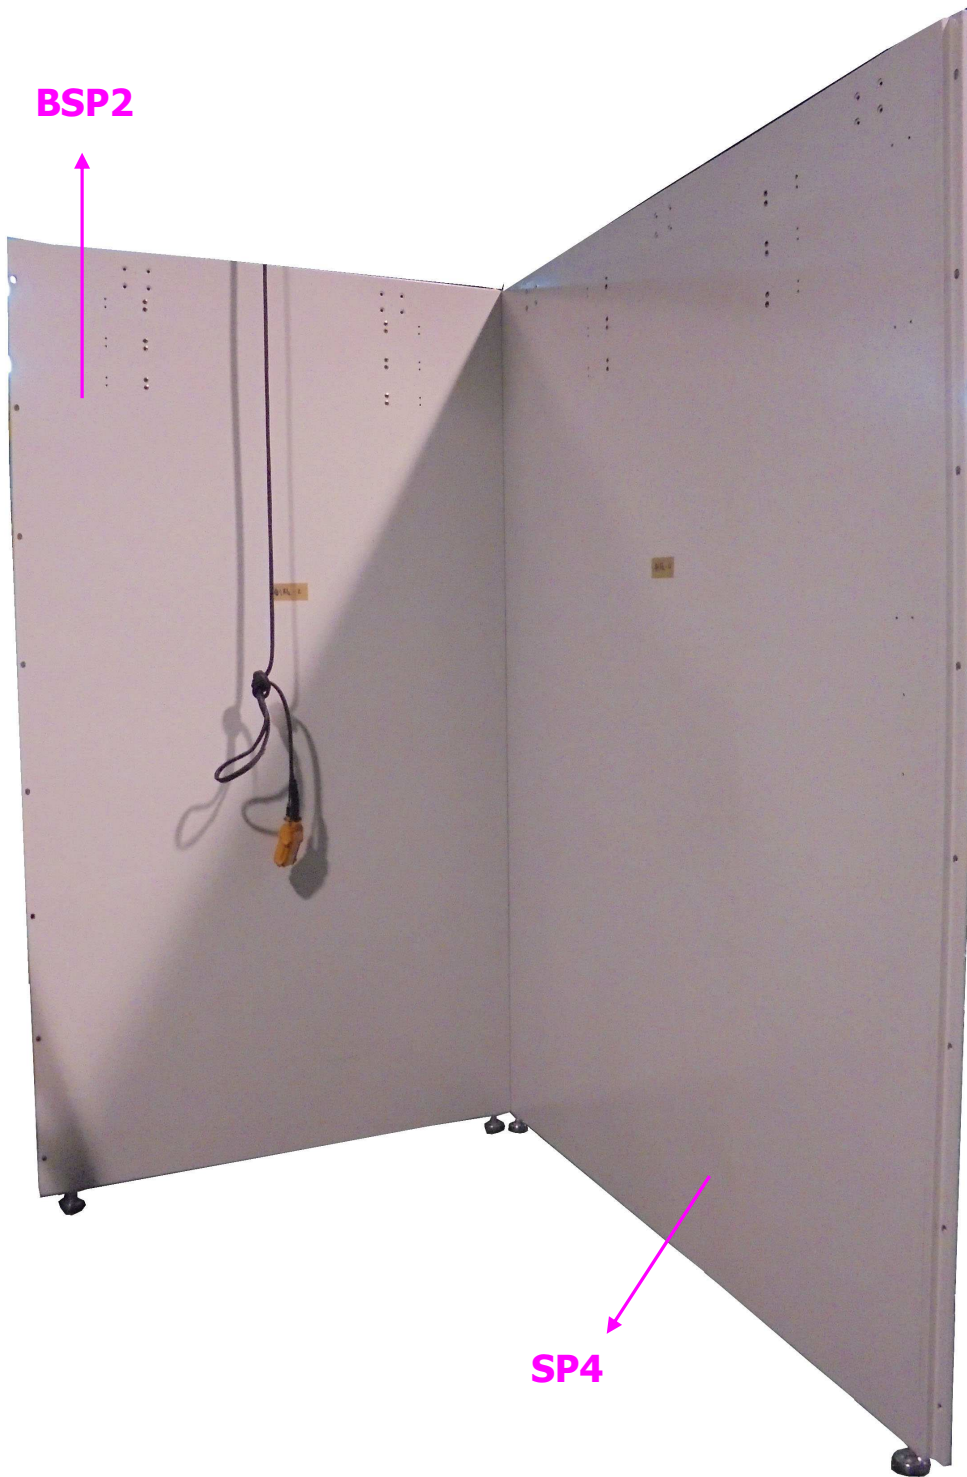

✚ Installations for WB-9012G

- Take out the number: **BSP1**
- Join **BSP1** to **BSP2** with:

Hardware B				
Part name	Description	Photos	Q'ty	Grainger Model #
Hex Screw	5/16" x 2-1/2"		8	1YU38
Flat Washer	5/16" x OD23 x 2T		16	*1JY31
Nylon Hex Nut	5/16"		8	3XTK3



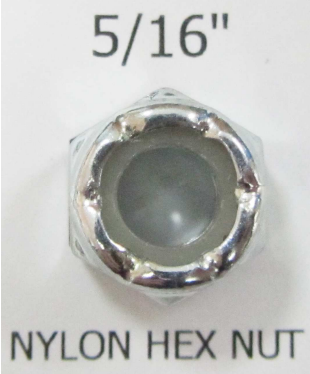
(*) Hardware item at similar spec available locally.

Installations for WB-9012G




✚ Installations for WB-9012G

- Take out the number: **SP3**.
- Fasten **SP3** to **BSP1** together with:

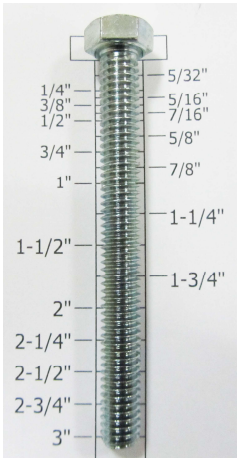Hardware A				
Part name	Description	Photos	Q'ty	Grainger Model #
Hex Screw	5/16" x 3"		8	1YU39
Flat Washer	5/16" x OD23 x 2T		16	*1JY31
Nylon Hex Nut	5/16"		8	3XTK3



(*) Hardware item at similar spec available locally.

Installations for WB-9012G

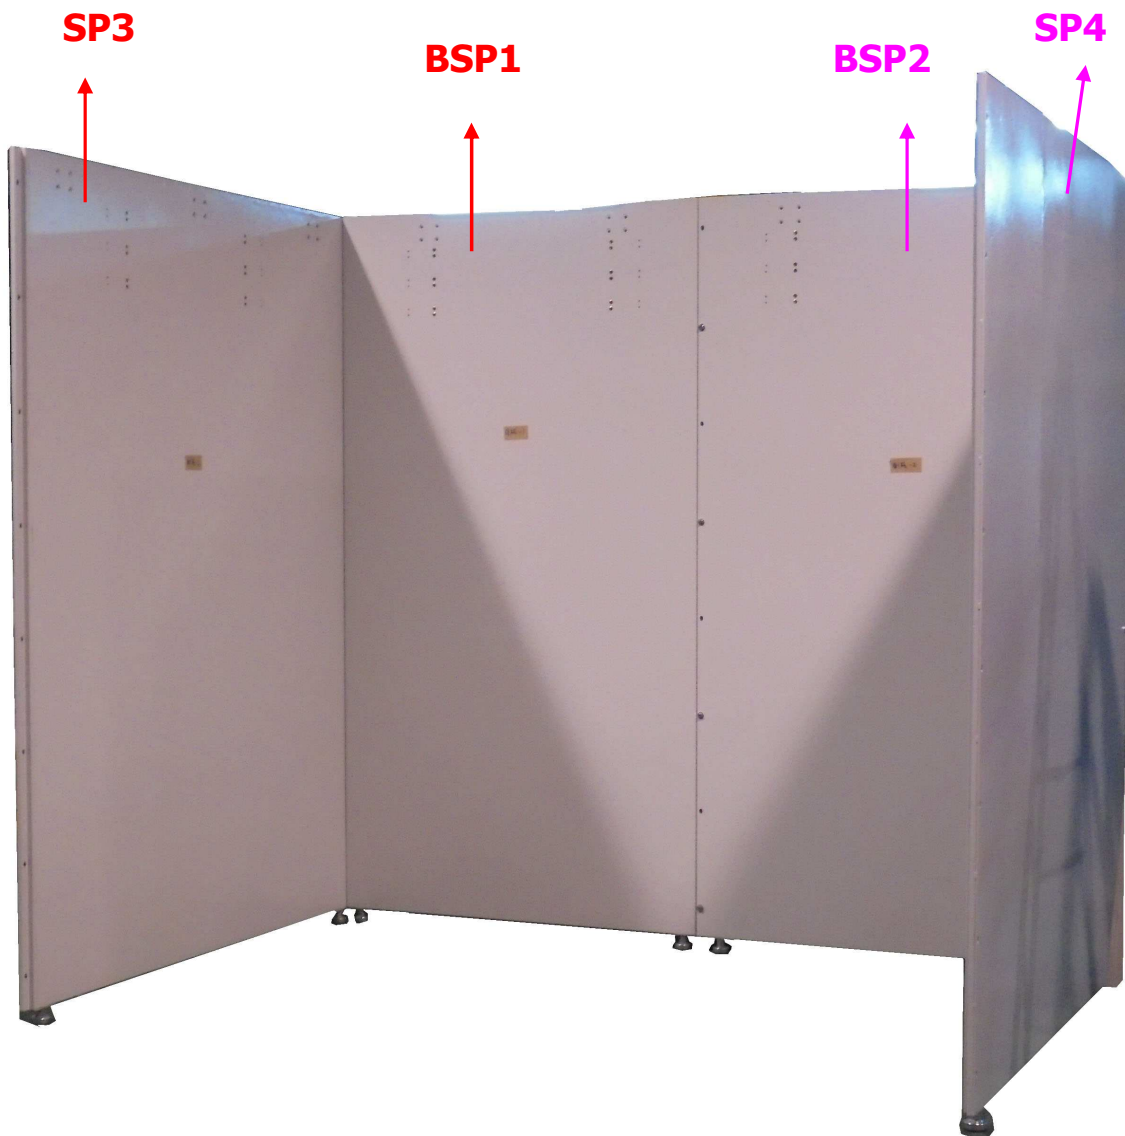

✚ Installations for WB-9012G

- Take out the number: **THD2**
- Fasten **THD2** to **SP3 . SP4 . BSP1** and **BSP2** with:

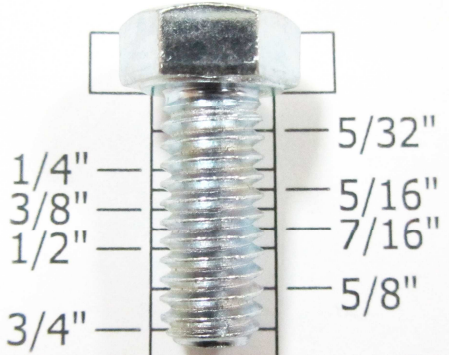Hardware E				
Part name	Description	Photos	Q'ty	Grainger Model #
Hex Screw	5/16 x 3/4"		24	1YU33
Flat Washer	5/16" x OD16 x 2T		24	*1JY31

(*) Hardware item at similar spec available locally.

✚ Installations for WB-9012G



🔧 Installations for WB-9012G

- Take out the number: **SP6**
- Fasten **SP6** to **SP4** with:

Hardware C				
Part name	Description	Photos	Q'ty	Grainger Model #
Hex Screw	5/16" x 2-1/2"		8	1YU38
Flat Washer	5/16" x OD23 x 2T		16	*1JY31
Nylon Hex Nut	5/16"		8	3XTK3

(*) Hardware item at similar spec available locally.

Installations for WB-9012G




✚ Installations for WB-9012G

- Take out the number: **SP5**
- Fasten **SP5** to **SP3** with:

Hardware C				
Part name	Description	Photos	Q'ty	Grainger Model #
Hex Screw	5/16" x 2-1/2"		8	1YU38
Flat Washer	5/16" x OD23 x 2T		16	*1JY31
Nylon Hex Nut	5/16"		8	3XTK3



(*) Hardware item at similar spec available locally.

✦ Installations for WB-9012G

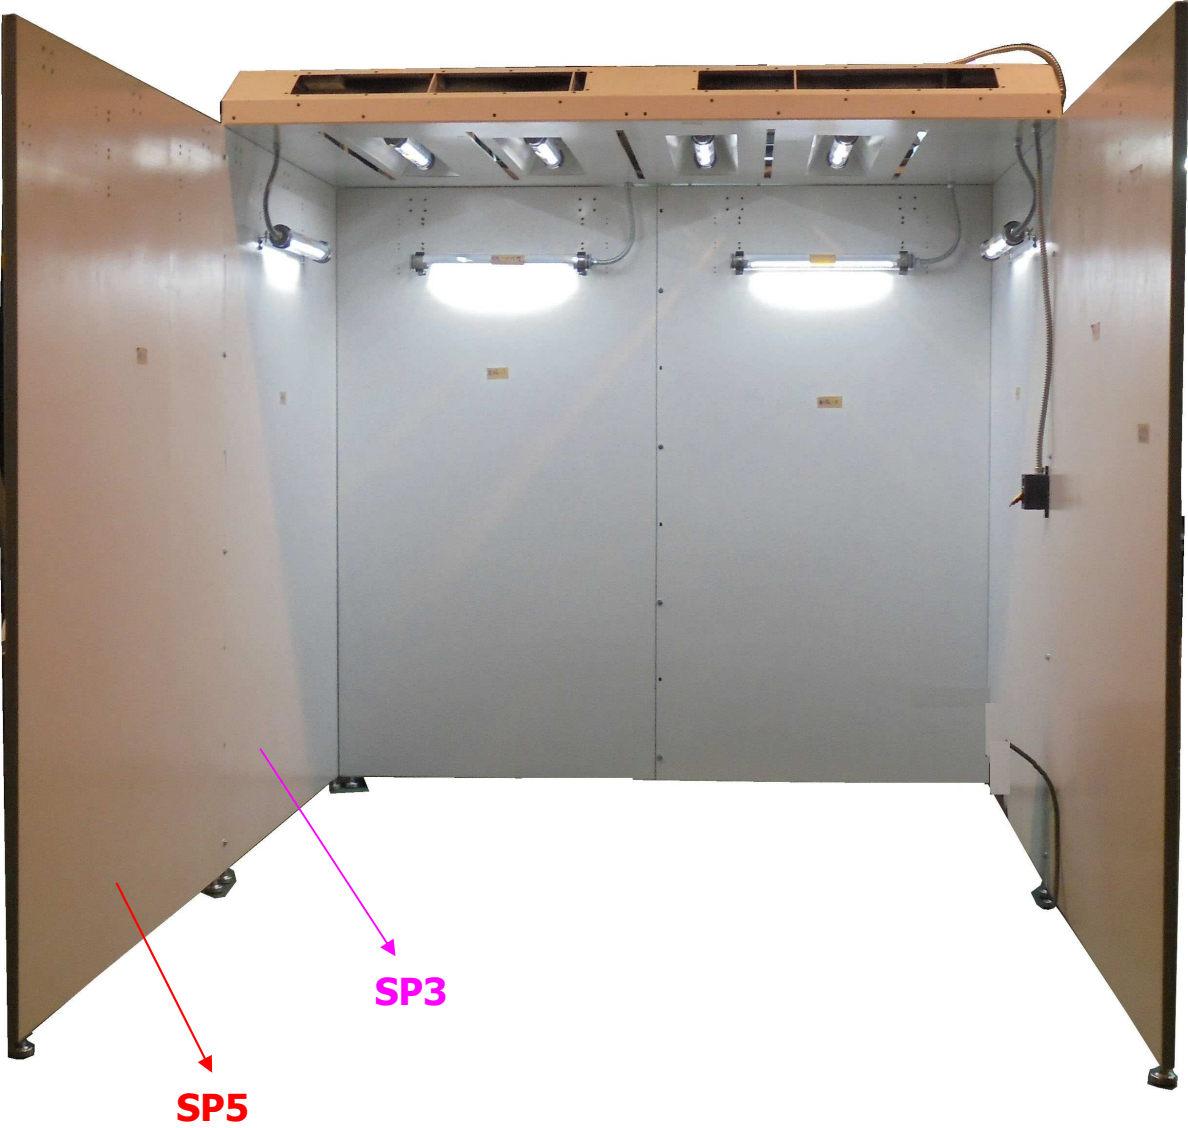

✚ Installations for WB-9012G

- Take out the number: **THD1**
- Fasten **THD1** to **SP5** and **SP6** with:

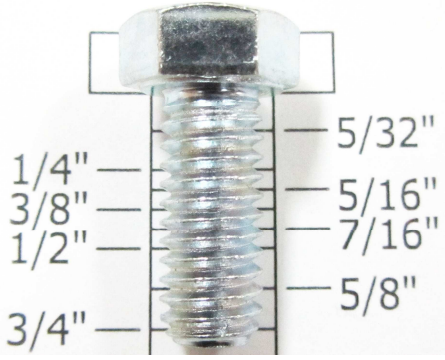Hardware E				
Part name	Description	Photos	Q'ty	Grainger Model #
Hex Screw	5/16 x 3/4"		14	1YU33
Flat Washer	5/16" x OD16 x 2T		14	*1JY31

(*) Hardware item at similar spec available locally.


✚ Installations for WB-9012G

- Fasten **THD1** to **THD2** with:

Hardware D				
Part name	Description	Photos	Q'ty	Grainger Model #
Hex Screw	3/8" x 1-1/4"		14	1YU44
Flat Washer	3/8" x OD23 x 2T		28	*1JY33
Nylon Hex Nut	3/8"		14	3HDU4



(*) Hardware item at similar spec available locally.

Installations for WB-9012G

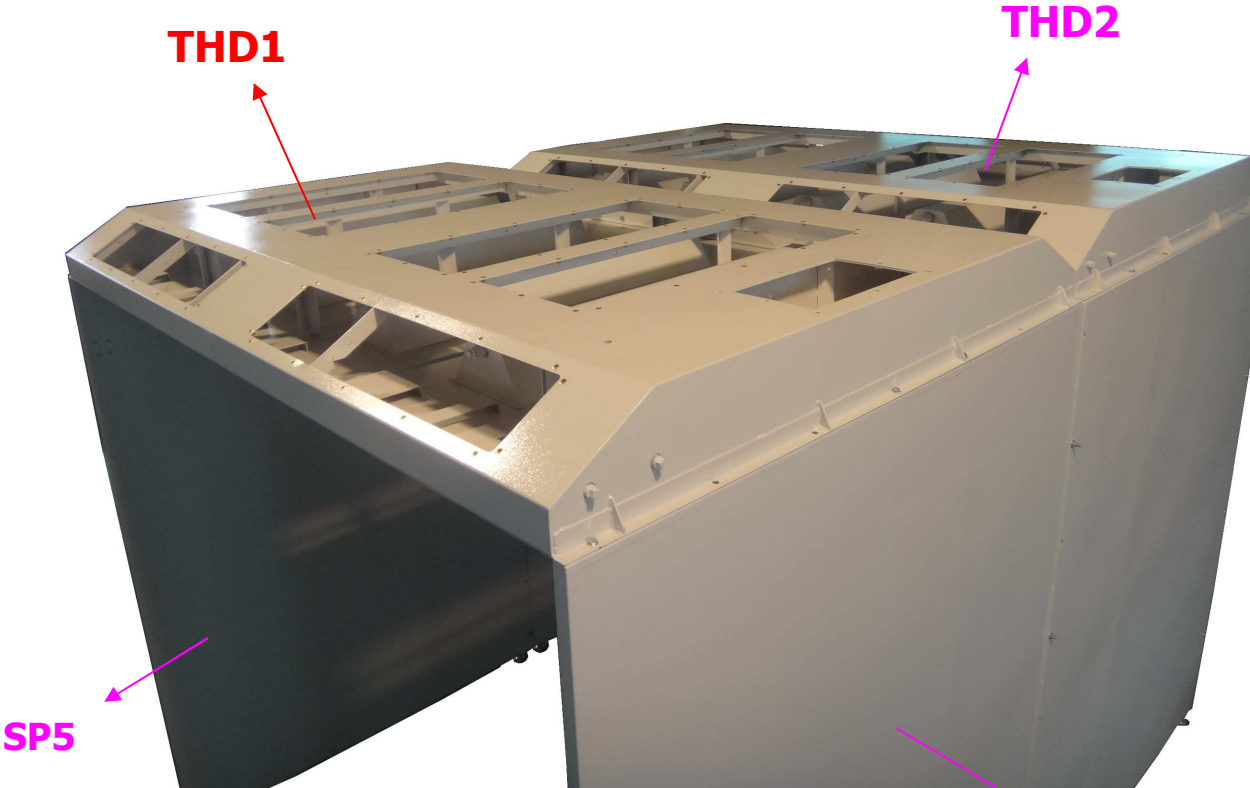


✚ Installations for WB-9012G

- Take out the number: **Flange**
- Join **Flange** to **THD1** and **THD2** with:

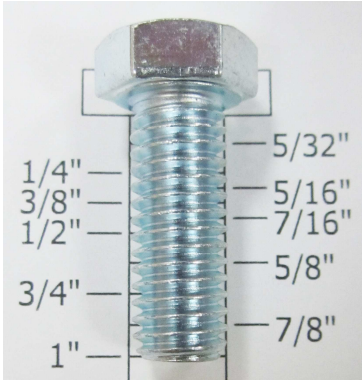

Hardware J				
Part name	Description	Photos	Q'ty	Grainger Model #
Hex Screw	3/8 x 1"		16	1YU43
Flat Washer	3/8" x OD23 x 2T		16	*1JY33

✚ Installations for WB-9012G

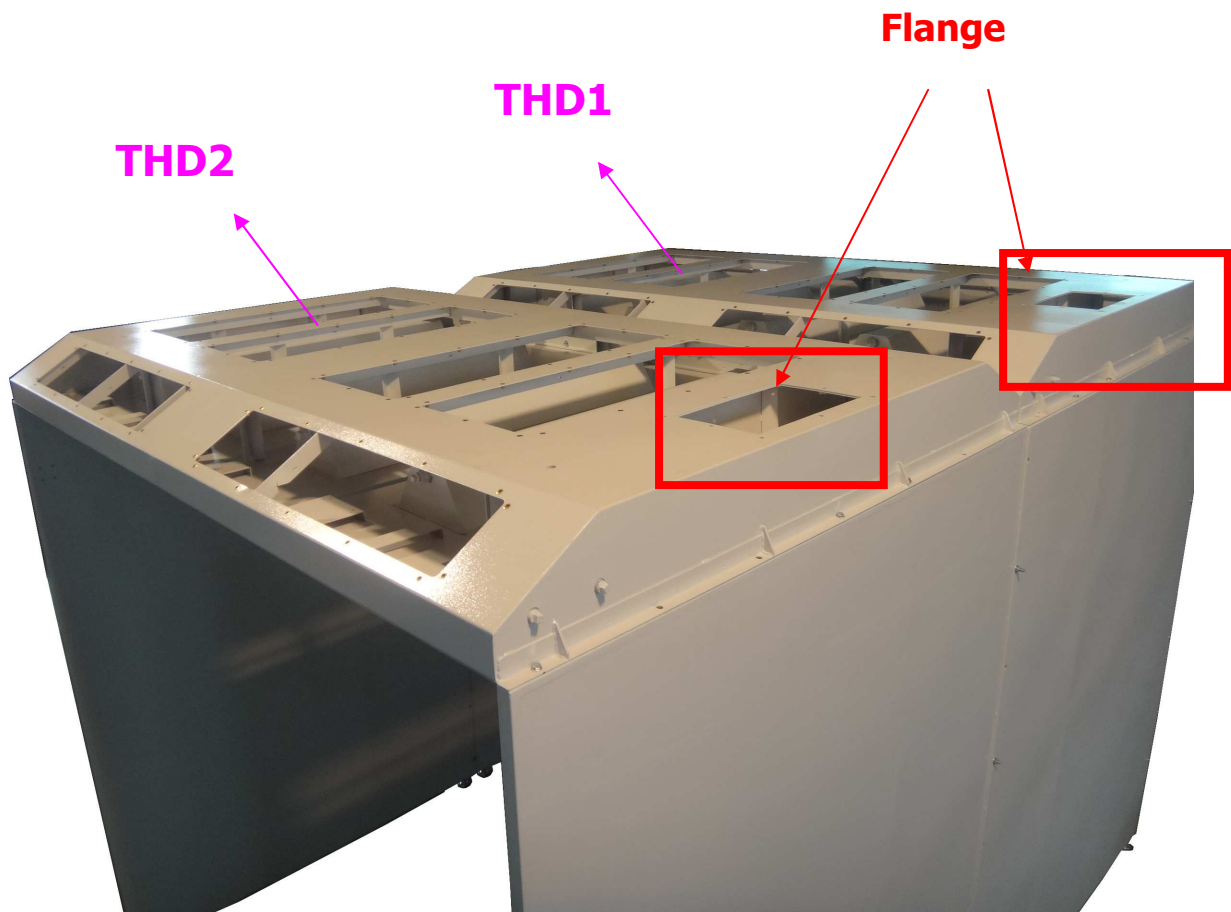


✚ Installations for WB-9012G

- Take out the number: **Working Light**
- Join **Working Light** to **SP3 ~ SP6** and **BSP1~BSP2** with:

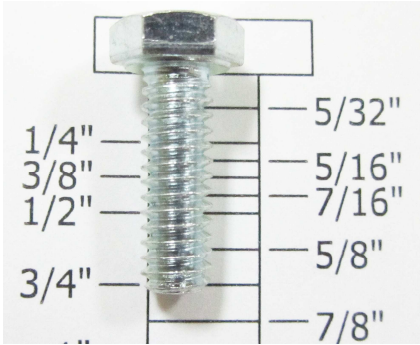
Hardware G				
Part name	Description	Photos	Q'ty	Grainger Model #
Hex Screw	1/4 x 3/4"		144	1UY24
Flat Washer	1/4" x OD19 x 2T		144	*1JY29

✚ Installations for WB-9012G

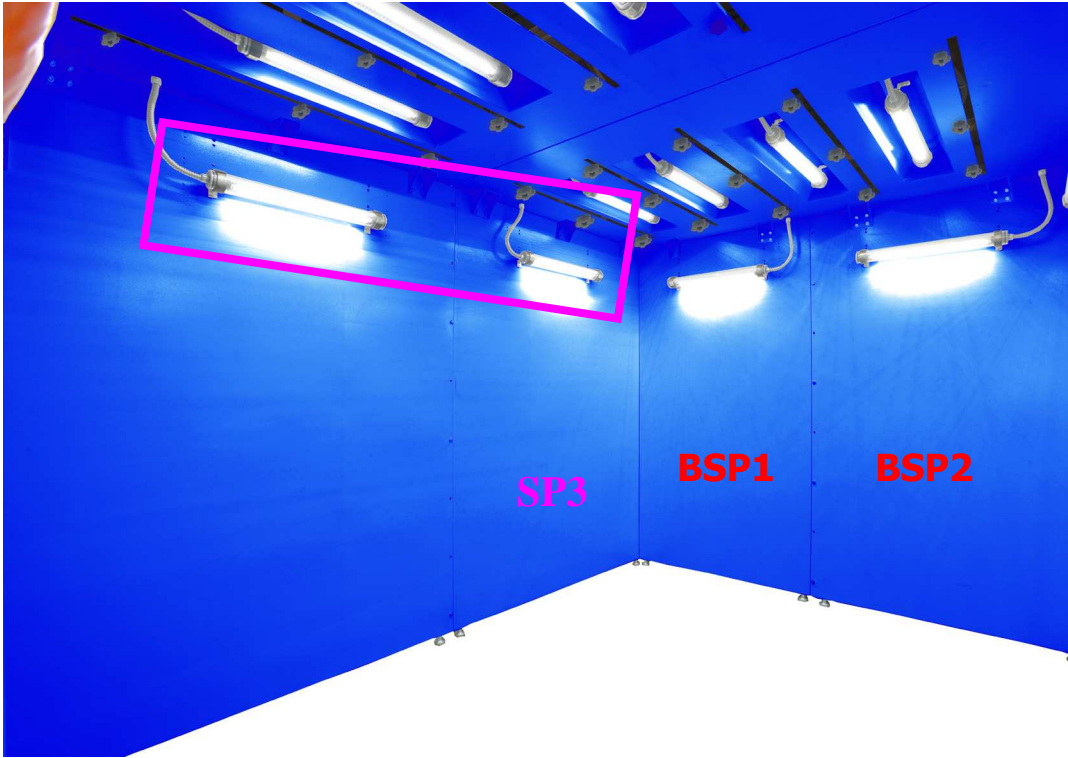



Installations for WB-9012G

Working Light

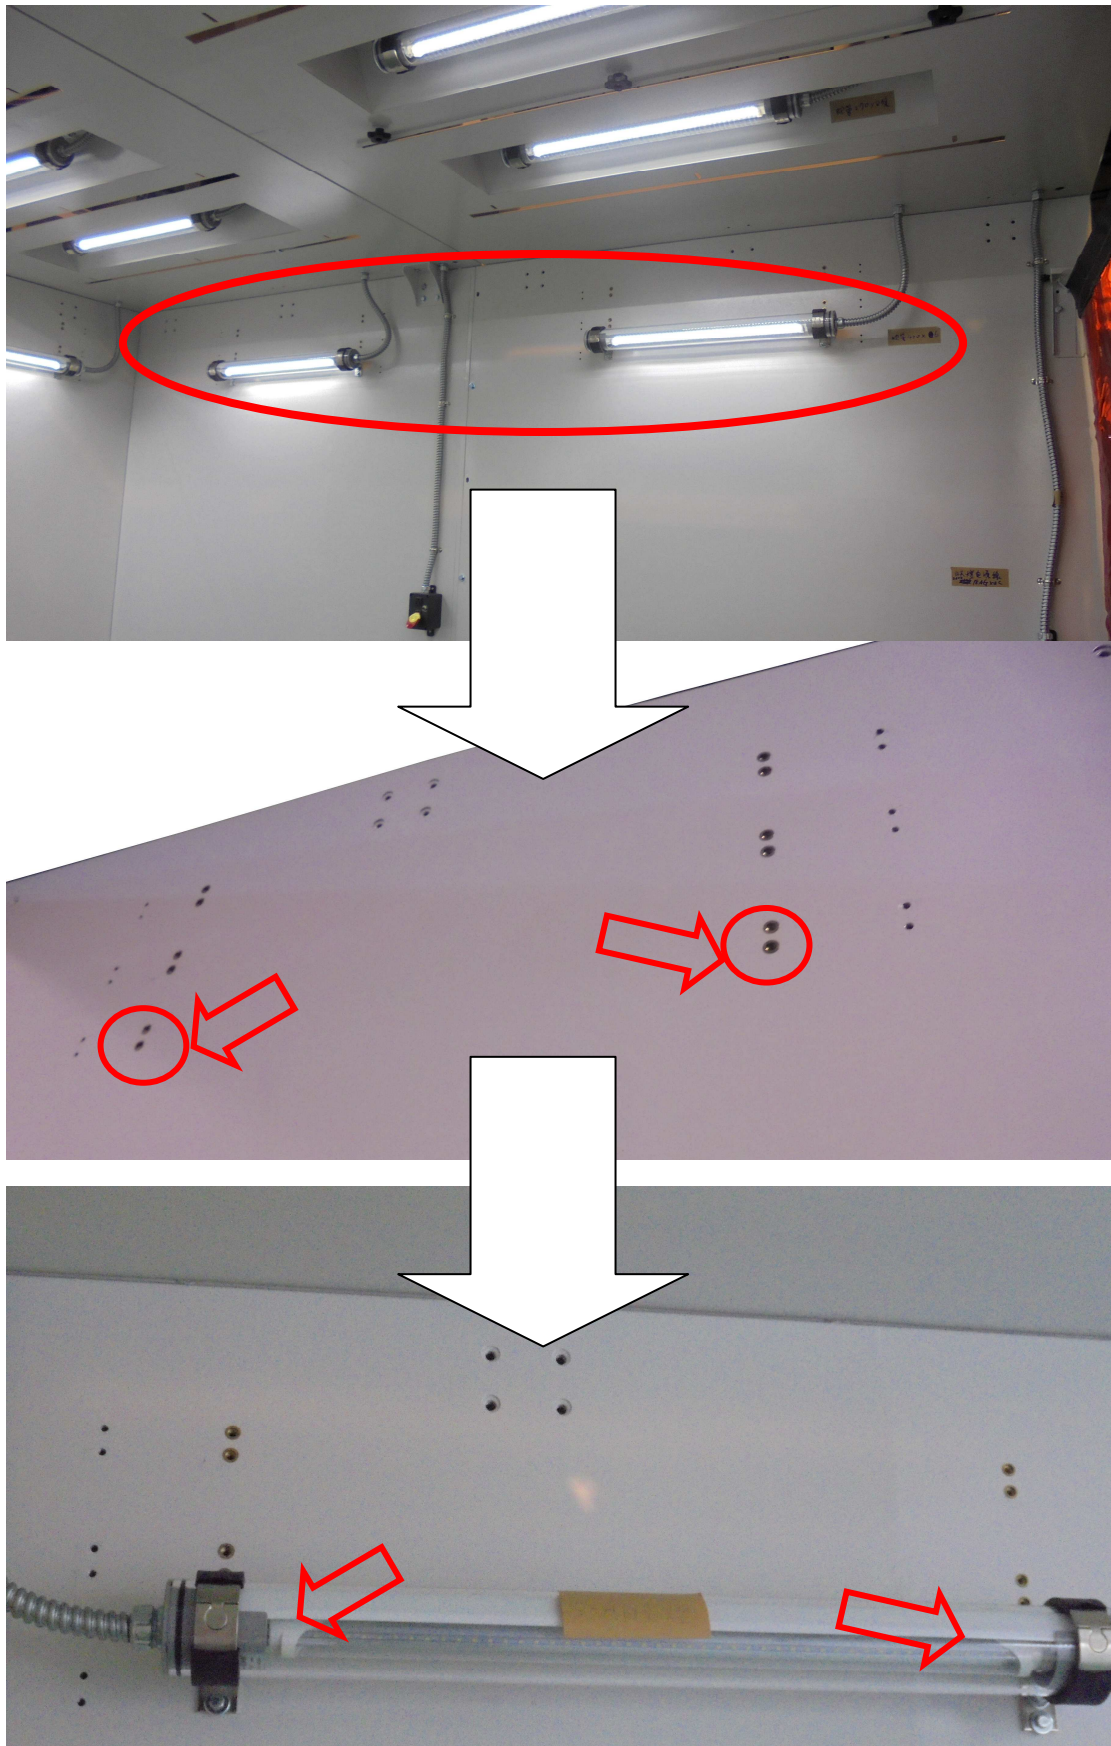


✚ Installations for WB-9012G

- Take out the number: **Fixing Base**
- Fasten **Fixing Base** to to **SP3 ~ SP6 . BSP1~BSP2**
and **THD1~THD2** with:

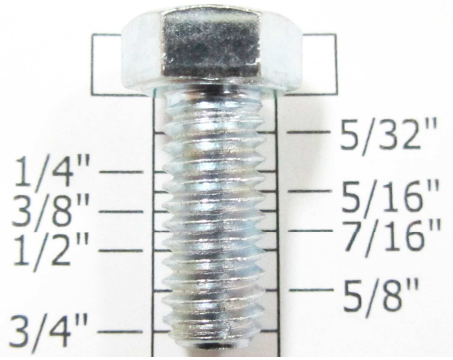Hardware K				
Part name	Description	Photos	Q'ty	Grainger Model #
Hex Screw	3/8" x 3/4"		108	1YU42
Flat Washer	3/8" x OD23 x 2T		108	*1JY33


(*) Hardware item at similar spec available locally.

✚ Installations for WB-9012G

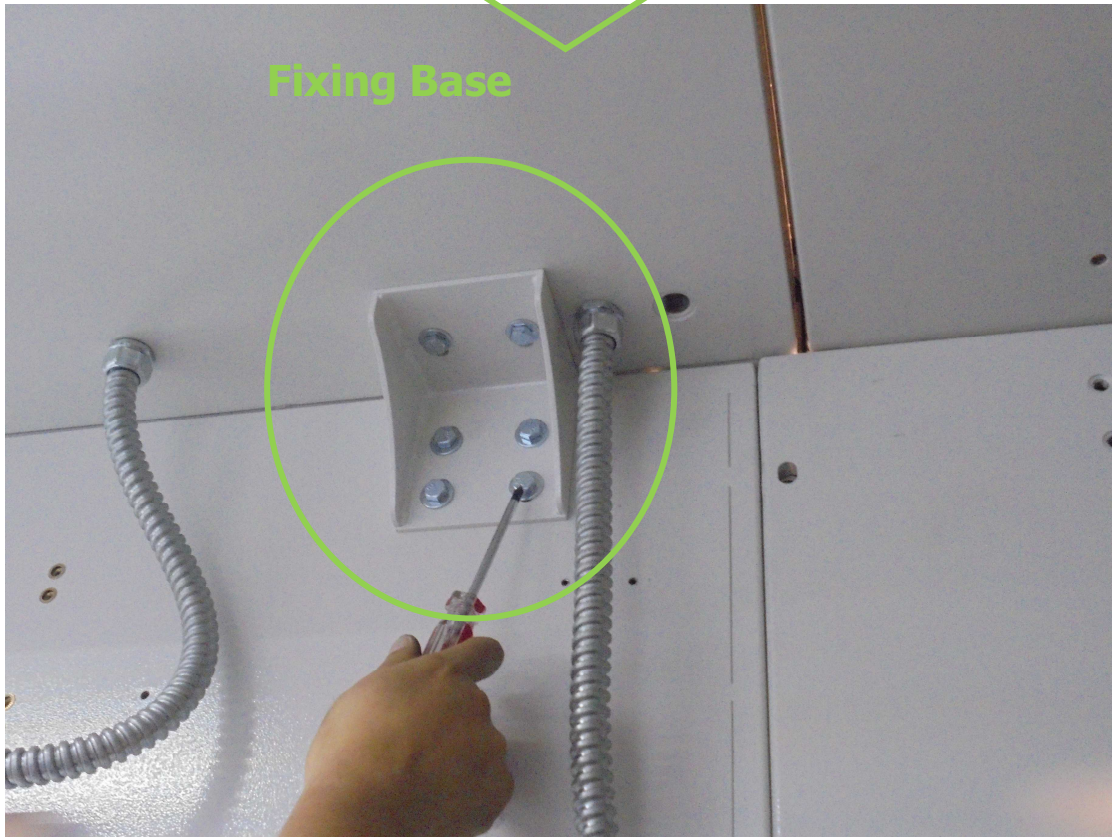


✚ Installations for WB-9012G


- Take out the number: **JUNCTION BOX**
- Fasten **JUNCTION BOX** to **SP4 . SP6** with:

Hardware J				
Part name	Description	Photos	Q'ty	Grainger Model #
Phillips Head Sheet Metal Screw	3/16" x 1/2"		6	

✚ Installations for WB-9012G

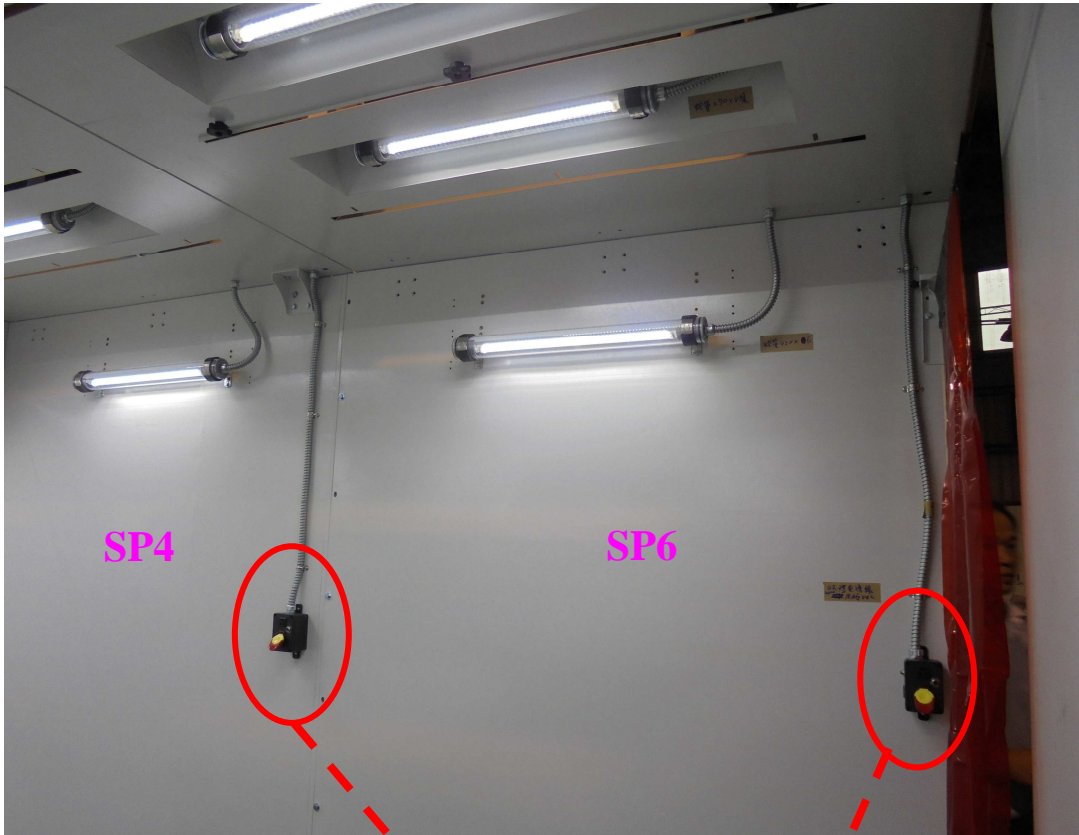

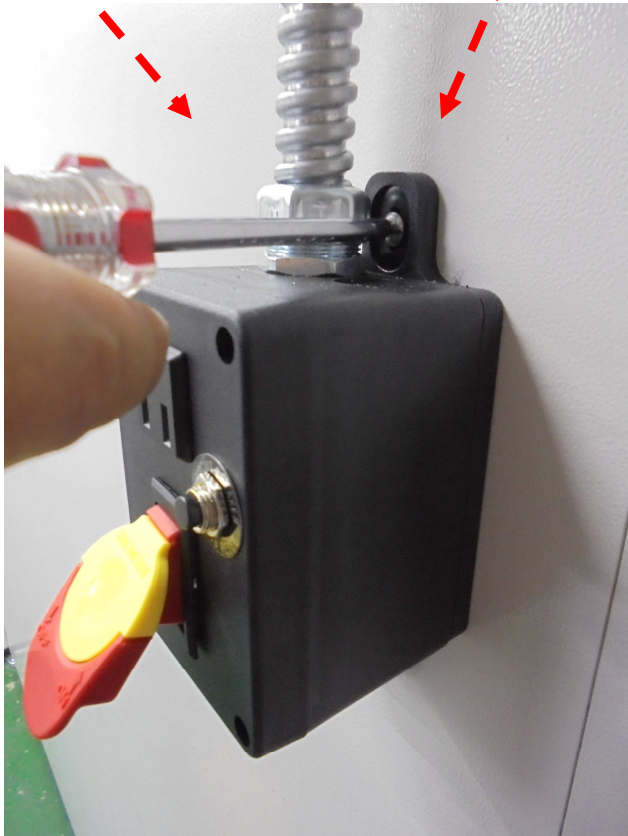

**JUNCTION
BOX**




✚ Installations for WB-9012G

- Take out the number: **Curtain Rod**
- Fasten **Curtain Rod** to **SP5** and **SP6** with:

Hardware F				
Part name	Description	Photos	Q'ty	Grainger Model #
Hex Screw	5/16 x 3/4"		8	1YU33
Flat Washer	5/16" x OD18 x 2T		8	*1JY31



(*) Hardware item at similar spec available locally.

Installations for WB-9012G

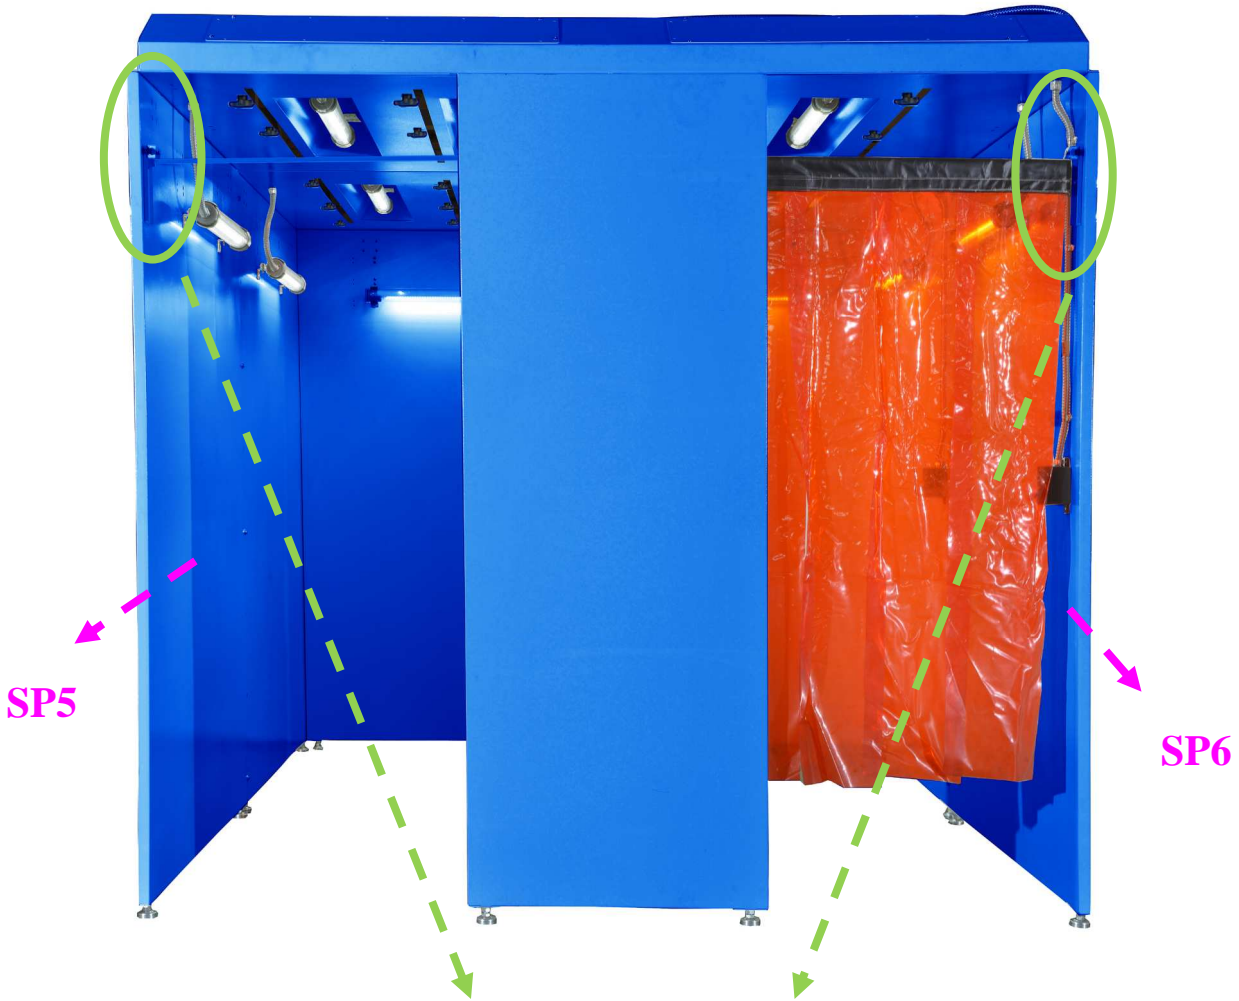


Curtain Rod




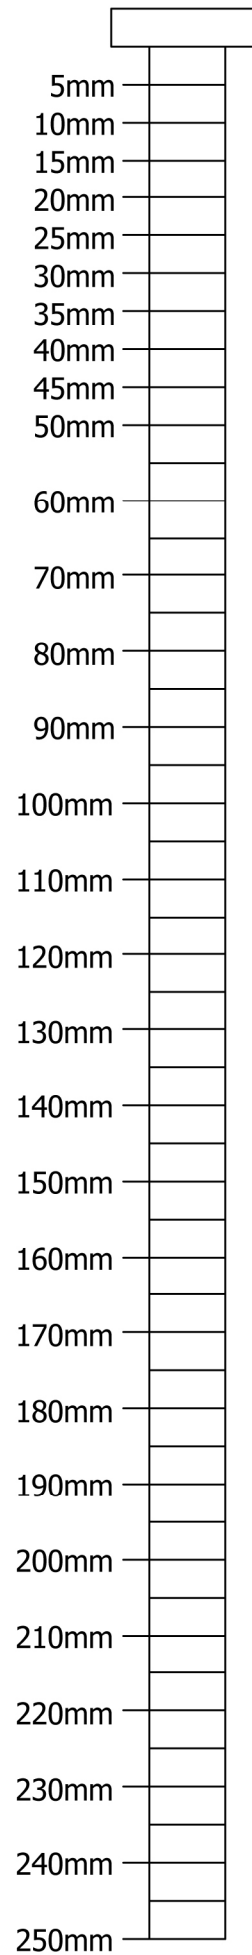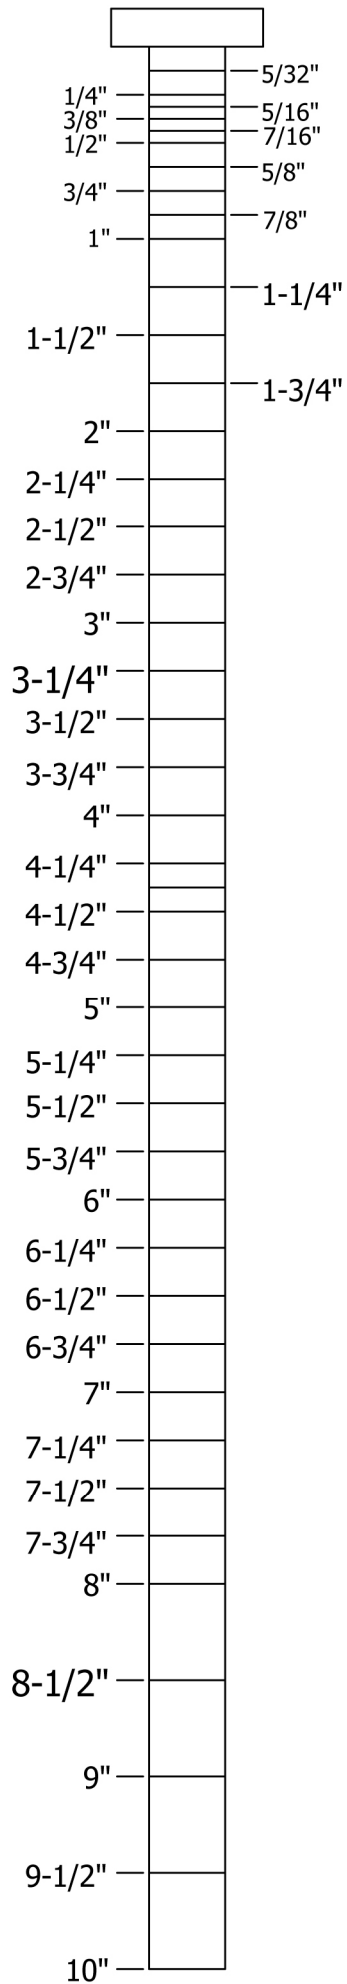


Flat Washer: 1/4"

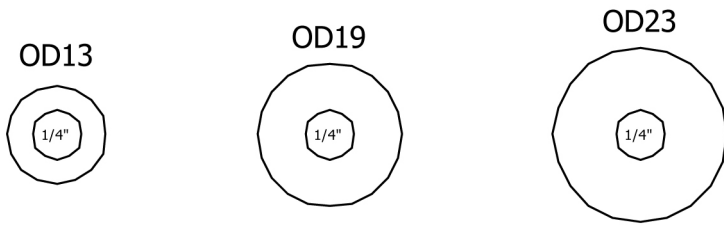


Flat Washer: 5/16"

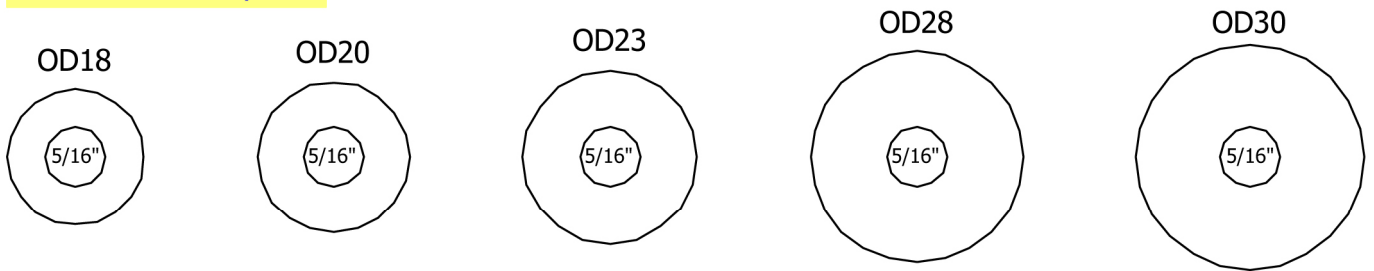


Flat Washer: 3/8"

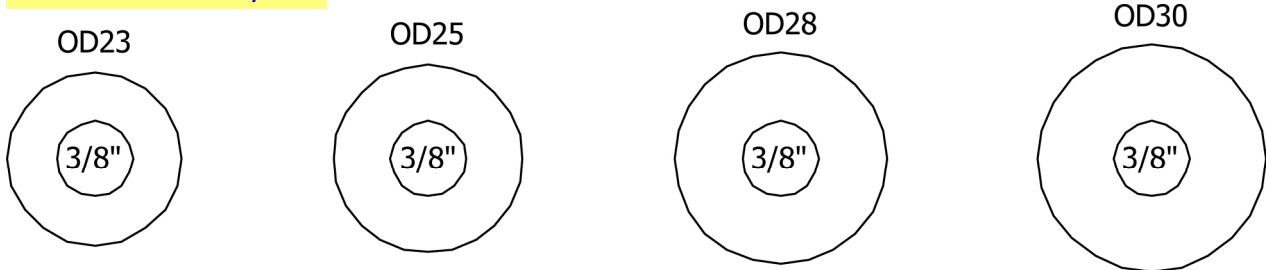


Flat Washer: 1/2"

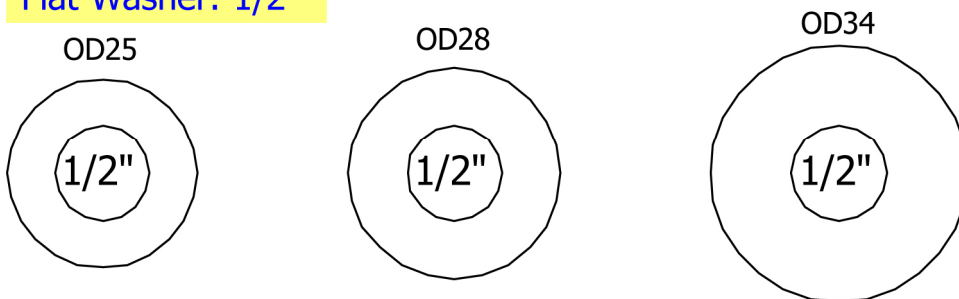

Flat Washer: 7/16"



Flat Washer: 5/8"

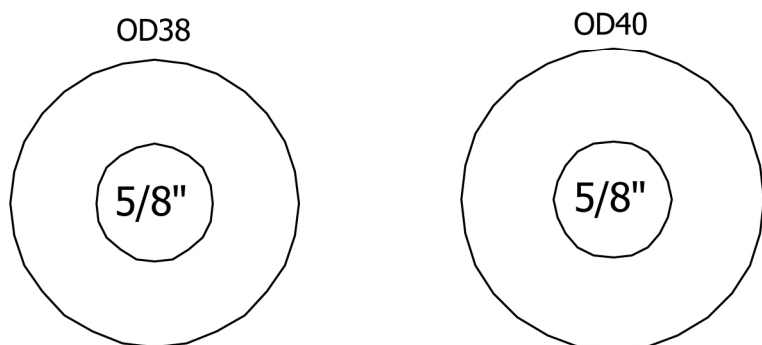

HEX NUT

3/16"




HEX NUT

1/4"




HEX NUT

5/16"




HEX NUT

3/8"



HEX NUT


1/2"



HEX NUT


NYLON HEX NUT

1/4"




NYLON HEX NUT

5/16"




NYLON HEX NUT

3/8"



NYLON HEX NUT

1/2"



NYLON HEX NUT