


ODF 9000 New Setup

Notes:

A=20" dia. 2000mm tube
B=20" dia. 90 deg elbow
C=18" dia. 500mm tube
D=16" dia. 2000mm tube
E=16" dia. 1000mm tube
F=16" dia. 1000mm tube
G=12" dia. 2000mm tube
H=12" dia. 1000mm slip tube
I=12" dia. 90 deg elbow
J=12" dia. 60 deg elbow
K=10" dia. 2000mm tube
L=10" dia. 1000mm tube
M=10" dia. 1000mm slip tube
N=10" dia. 500mm tube
O=10" dia. 200mm tube

P=10" dia. 200mm slip tube
Q=8" dia. 2000mm tube
R=8" dia. 1000mm tube
S=8" dia. 1000mm slip tube
T=8" dia. 500mm tube
U=8" dia. 30 deg elbow
V=6" dia. 2000mm tube
W=6" dia. 1000mm tube
X=6" dia. 1000mm slip tube
Y=6" dia. 500mm tube
Z=6" dia. 500mm slip tube
AA=6" dia. 200mm tube
AB=6" dia. 200mm slip tube
AC=6" dia. 90 deg elbow
AD=6" dia. 60 deg elbow
AE=6" dia. 30 deg elbow

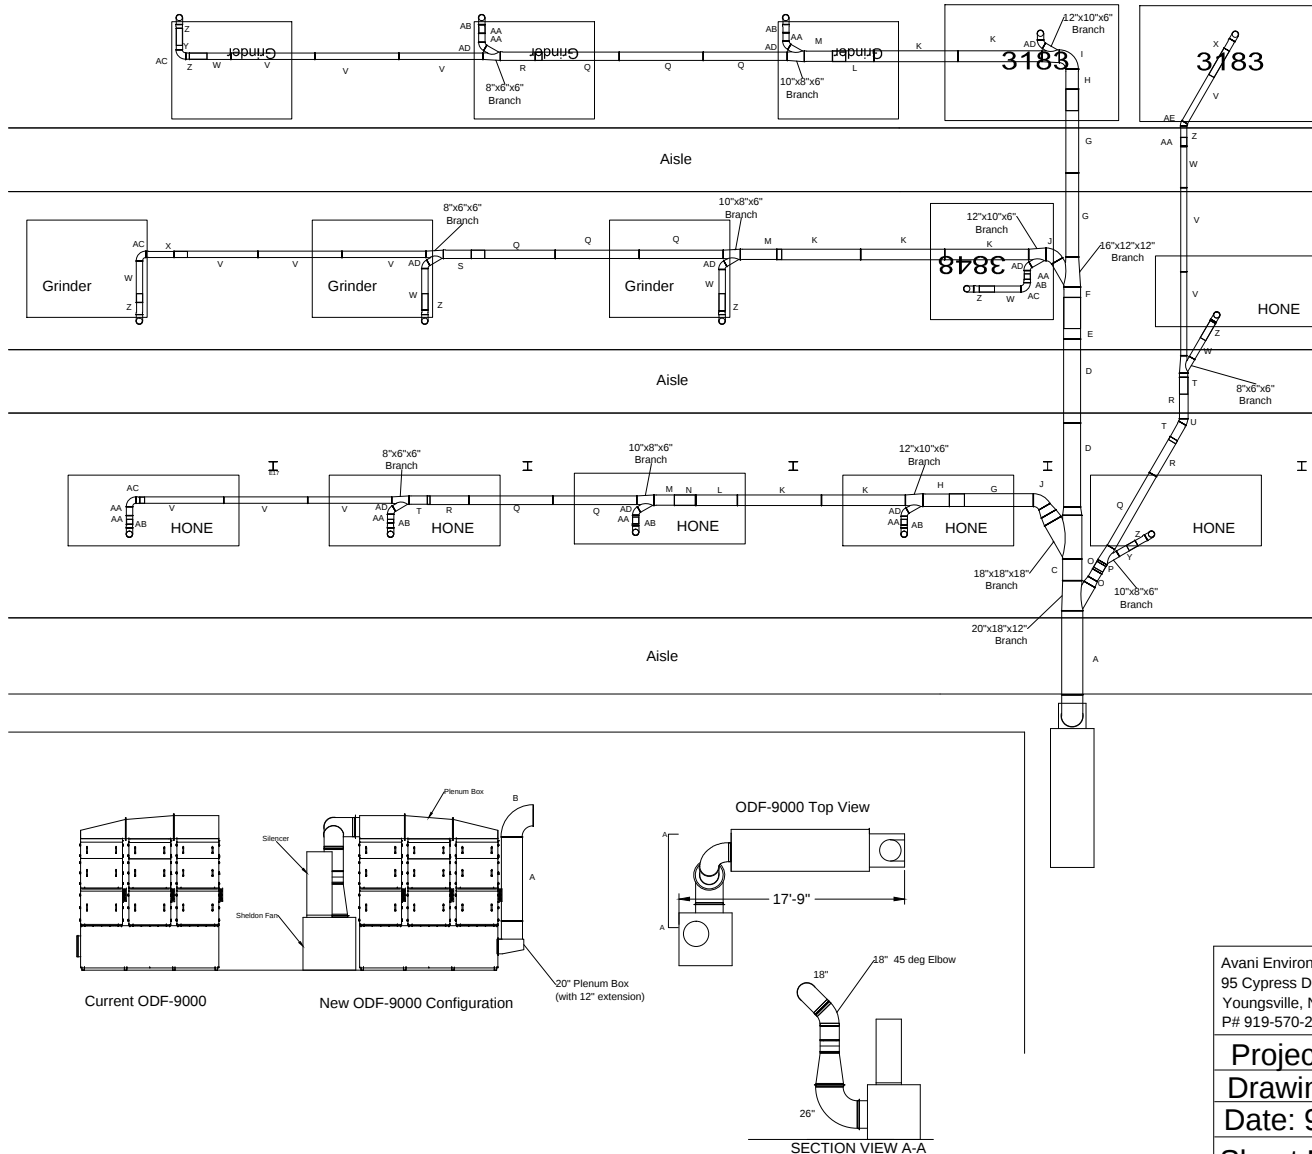

Notes:

1. All tubing, branches, reducers, and elbows provided by Jacobs Tubing Systems.
2. ODF-9000 and Fan previously used by Eaton Roxboro
3. All Machines assumed to be 9' tall
4. Grinders already have Fire Dampers and Blast Gates installed.

Avani Environmental Intl. Inc.
95 Cypress Drive
Youngsville, NC 27596
P# 919-570-2862 F# 919-570-2863

Avani

Project: Roxboro Eaton 8.16.12 Layout

Drawing: ODF-9000 New Setup

Date: 9-4-12

Drawn by: MDT

Sheet No: 2 OF 2