Carteret Community College
Welding Shop Duct Layout

Plan View

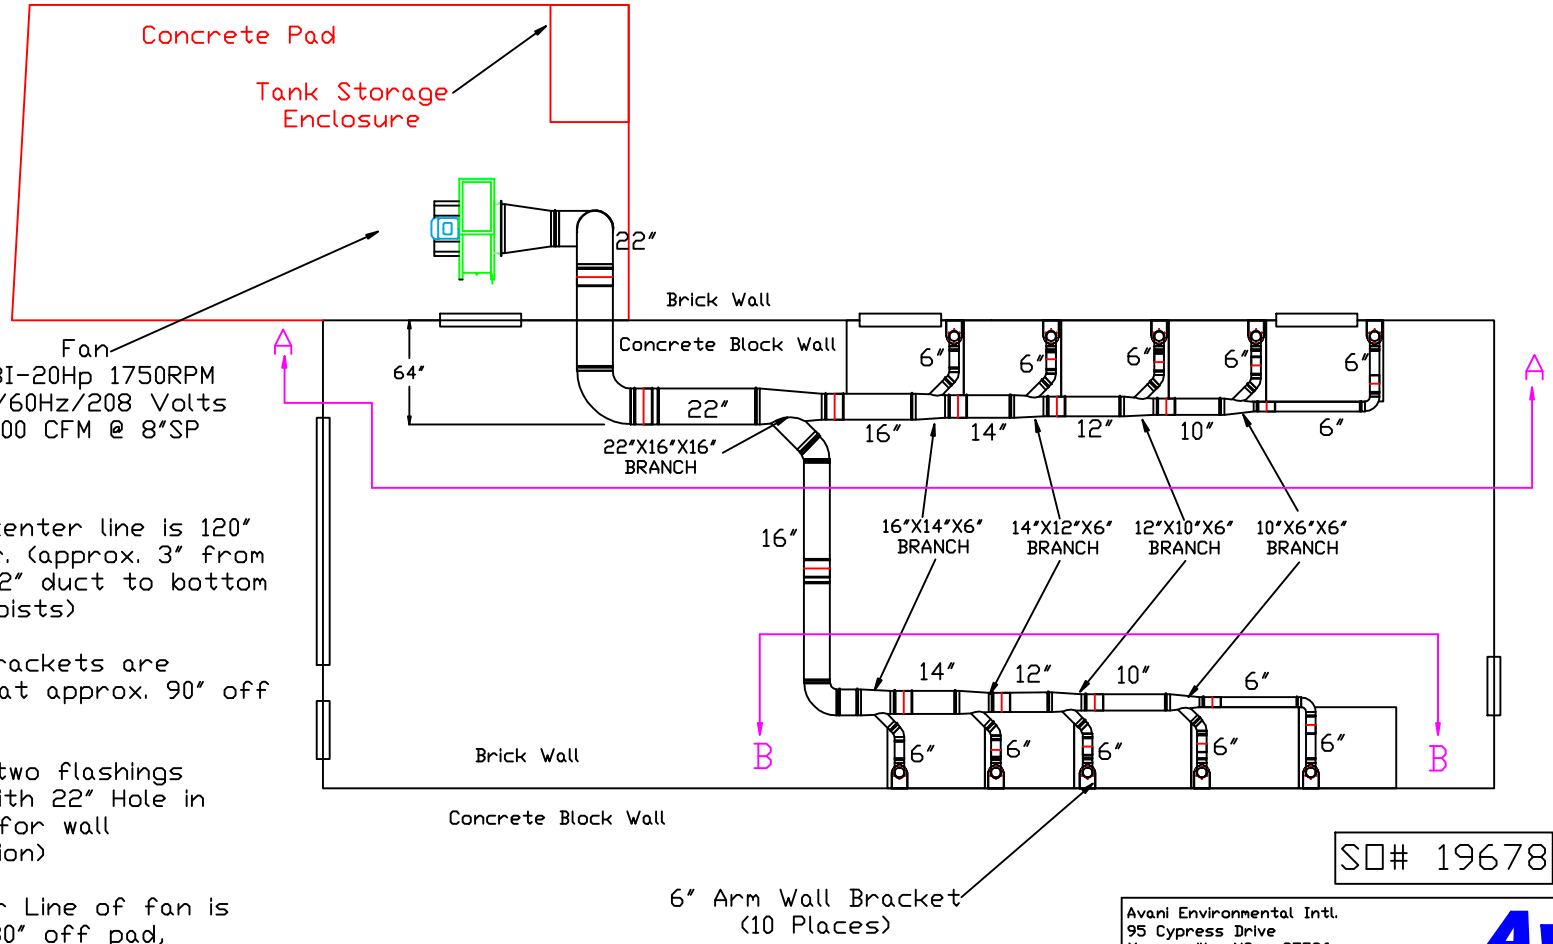

Notes:
1) Duct center line is 120" off floor. (approx. 3" from top of 22" duct to bottom of bar joists)

2) Arm brackets are mounted at approx. 90" off floor.

3) Need two flashings 30"X30" with 22" Hole in center. (for wall penetration)

4) Center Line of fan is approx. 30" off pad,

5) Center line of fan to center line of trunk line is approx. 90".

SO# 19678

Avani Environmental Intl.
95 Cypress Drive
Youngsville, NC 27596
P# 919-570-2862 F# 919-570-2863

Avani

Project: Carteret Comm. College	
Drawing: Welding Shop Duct Layout	
Date: 3/26/13	Drawn by: WWB
Sheet No: 1 of 1	Rev.: 0