
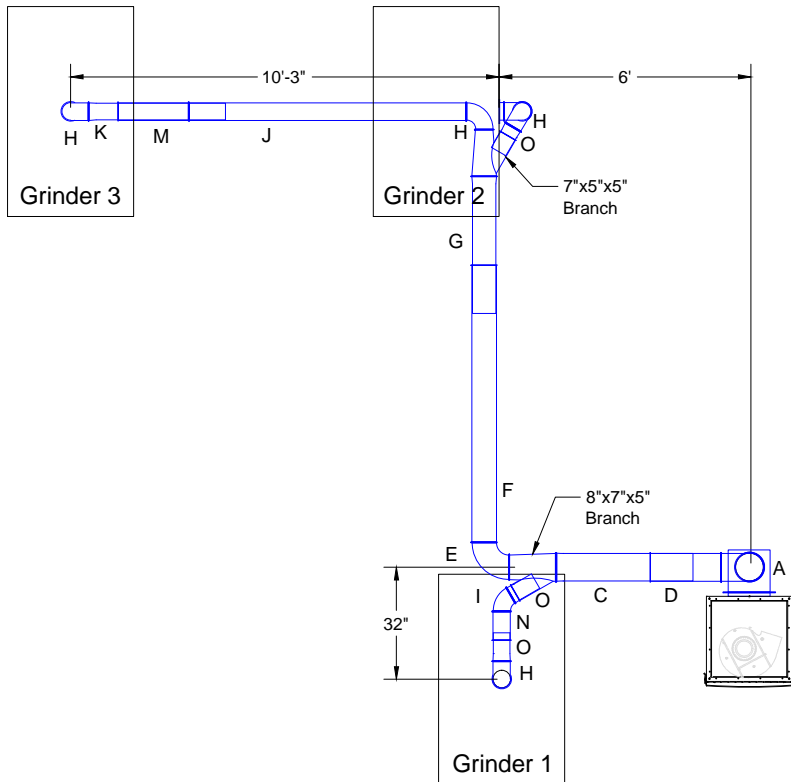


# Thomson Linear SO21399 Duct Layout

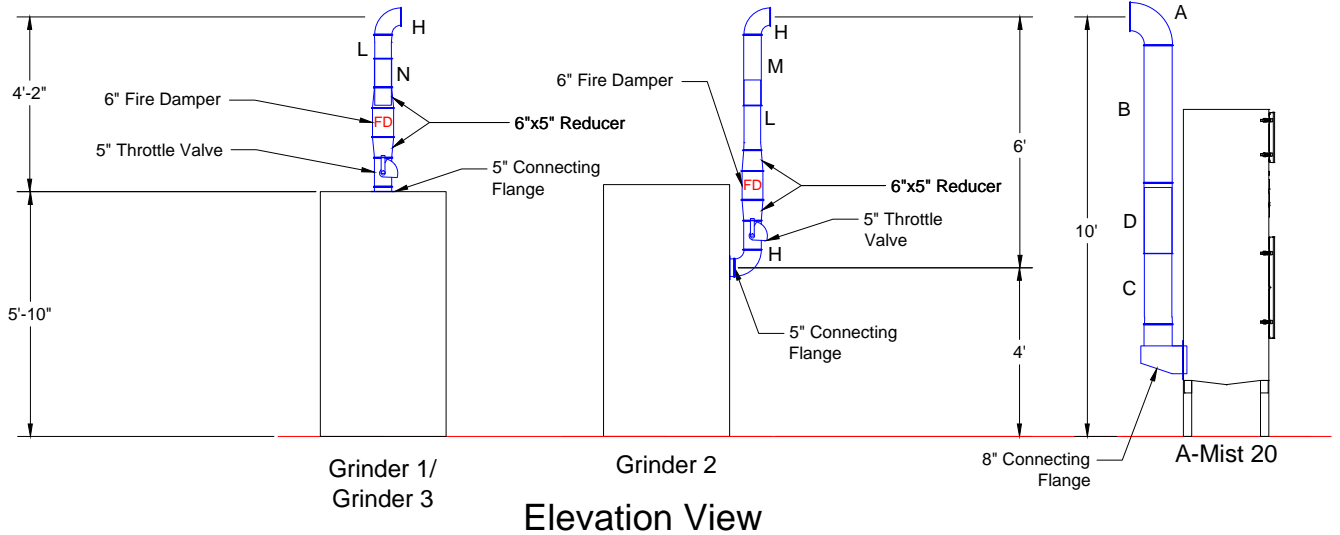

**Notes:**

1. Clamp together duct to connect to existing duct
2. Avani Environmental standard installation crew is quoted out per day based on the above drawings and approvals. Any changes, modifications, downtime, or inability to perform our work above and beyond the control of Avani Environmental will charge an additional \$1,000 per work day (5 or more hours) per crew above what was initially quoted.

**Parts:**

- |                         |                         |                         |
|-------------------------|-------------------------|-------------------------|
| A. 8" 90° Elbow         | F. 7" 2000 mm tube      | K. 5" 1000 mm slip tube |
| B. 8" 1000 mm tube      | G. 7" 1000 mm slip tube | L. 5" 500 mm slip tube  |
| C. 8" 1000 mm slip tube | H. 5" 90° Elbow         | M. 5" 500 mm tube       |
| D. 8" 500 mm tube       | I. 5" 60° Elbow         | N. 5" 200 mm tube       |
| E. 7" 90° Elbow         | J. 5" 2000 mm tube      | O. 5" 200 mm slip tube  |

Avani Environmental Intl.  
95 Cypress Drive  
Youngsville, NC 27596  
P# 919-570-2862 F# 919-570-2863

**Avani**

**Project: Thomson Linear SO21399**

**Drawing: Duct Layout**

**Date: 5/21/14**

**Drawn by: MDT**

**Sheet No: 1 of 1**

**Rev.: 0**