


# Rectangular Silencer Submittal

## Models

- |                             |                               |
|-----------------------------|-------------------------------|
| <input type="checkbox"/> HP | <input type="checkbox"/> LHP  |
| <input type="checkbox"/> MP | <input type="checkbox"/> LMP  |
| <input type="checkbox"/> LP | <input type="checkbox"/> LLP  |
|                             | <input type="checkbox"/> SLLP |

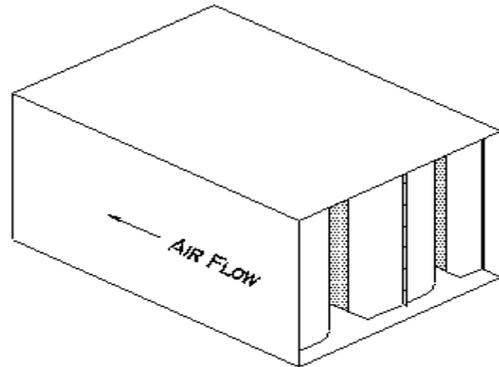

## CONSTRUCTION

Casing : 22 gauge Galvanized Steel  
Baffles: 24 gauge Galvanized Steel  
Fill is Fiberglass under compression to obtain catalog performance.  
ASTM-E84 rating characteristics:

Flamespread - 10

Smoke Developed - 10

Attached certified data is based on tests conducted in accordance  
with ASTM E-477

Project: DISCHARGE SILENCER

Engineer:

Contractor:

Submitted by: IAQ

Date: Sept. 25, 2009

**AeroSonics, Inc.**

SOUND CONTROL PRODUCTS

1601 Industrial Park Drive  
California, MO 65018  
Tel. (573) 796-4151 Fax (573) 796-4153