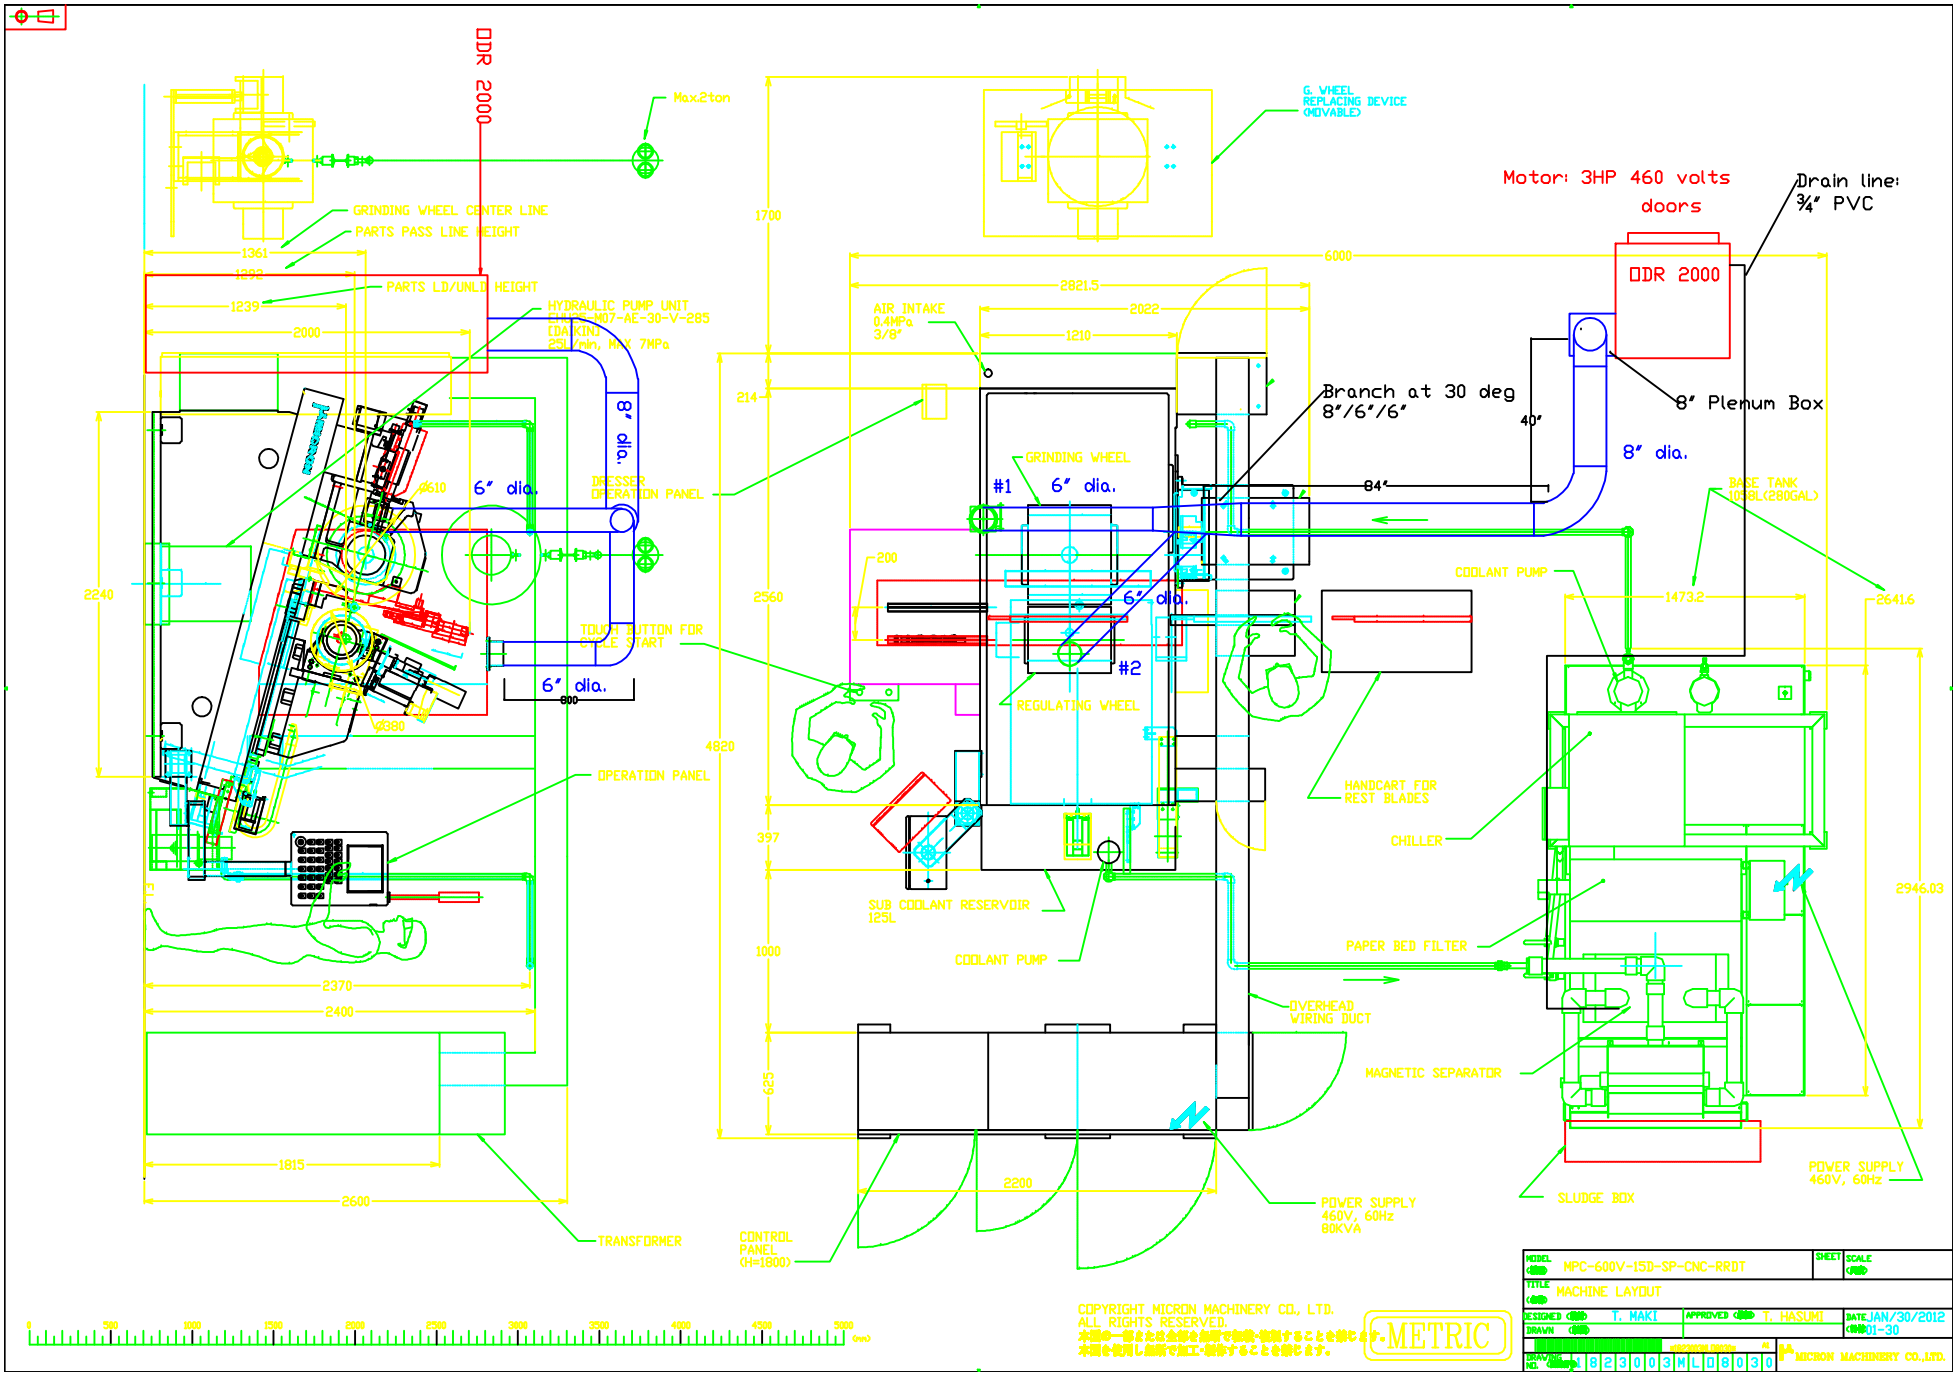
□DR 2000
Max.2ton
GRINDING WHEEL CENTER LINE
PARTS PASS LINE HEIGHT
PARTS LD/UNLD HEIGHT
HYDRAULIC PUMP UNIT
8" dia.
6" dia.
DRESSER OPERATION PANEL
TOUCH BUTTON FOR CYCLE START
OPERATION PANEL
TRANSFORMER
CONTROL PANEL (H=1800)
G. WHEEL REPLACING DEVICE (MOVABLE)
AIR INTAKE 0.4MPa 3/8"
GRINDING WHEEL
#1
#2
REGULATING WHEEL
SUB COOLANT RESERVOIR 125L
COOLANT PUMP
POWER SUPPLY 460V, 60Hz 80KVA
Motor: 3HP 460 volts
doors
Drain line: ¾" PVC
□DR 2000
Branch at 30 deg 8"/6"/6"
8" Plenum Box
8" dia.
BASE TANK 1059L(280GAL)
COOLANT PUMP
HANDCART FOR REST BLADES
CHILLER
PAPER BED FILTER
OVERHEAD WIRING DUCT
MAGNETIC SEPARATOR
SLUDGE BOX
POWER SUPPLY 460V, 60Hz
MODEL MPC-600V-15D-SP-CNC-RRDT
TITLE MACHINE LAYOUT
DESIGNED T. MAKI
APPROVED T. HASUMI
DRAWN
DATE JAN/30/2012
SCALE 1:30
DRAWING NO. 8230030ML080300
MICRON MACHINERY CO.,LTD.
METRIC
COPYRIGHT MICRON MACHINERY CO., LTD.
ALL RIGHTS RESERVED.