


FAN SIZE	FLANGED INLET-DIMENSIONS--INCHES					
	A I.D.	B O.D.	C $\pm 1/4$	D B.C. $\pm 3/32$	E	F DIA.
12 1/4	16 1/16	19 1/16	6 7/16	17 13/16	8	9/16
13 1/2	17 5/16	20 5/16	6 7/8	19 1/16	8	9/16
15	18 13/16	21 13/16	7 1/2	20 9/16	8	9/16
16 1/2	20 5/16	23 5/16	8 1/16	22 1/16	8	9/16
18 1/4	23 5/16	26 5/16	8 25/32	25 1/16	16	9/16
20	25 5/16	28 5/16	9 3/8	27 1/16	16	9/16
22 1/4	27 5/16	30 5/16	10 5/16	29 1/16	16	9/16
24 1/2	29 13/16	32 13/16	11 3/16	31 9/16	16	9/16
27	33 5/16	37 5/16	12 5/8	35 9/16	16	9/16
30	36 5/16	40 5/16	13 5/8	38 9/16	16	9/16
33	39 5/16	43 5/16	14 3/4	41 9/16	16	9/16
36 1/2	42 13/16	46 13/16	16 1/8	45 1/16	16	9/16

FLANGED INLET

ABOVE CENTERLINE
TYP. SIZES
8 3/4 - 33


BELOW CENTERLINE
TYP. SIZES
36 1/2 - 44 1/2

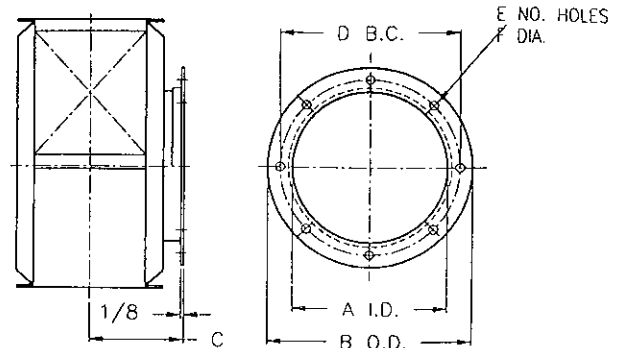

FL CLEANOUT DOOR & HOUSING DRAIN

CLEANOUT DOOR LOCATIONS MUST BE SPECIFIED ON ORDER BY "O'CLOCK" POSITION. THESE LOCATIONS ARE AS VIEWED FROM DRIVE SIDE AND DOORS ARE SYMMETRICAL ON O'CLOCK CENTERLINE. SEE RESTRICTIONS BELOW.

9T/9S ADJUSTABLE MOTOR BASES IMPOSE OBVIOUS DOOR POSITION RESTRICTIONS TO BE CONSIDERED WHEN SPECIFYING LOCATIONS ON ORDERS.

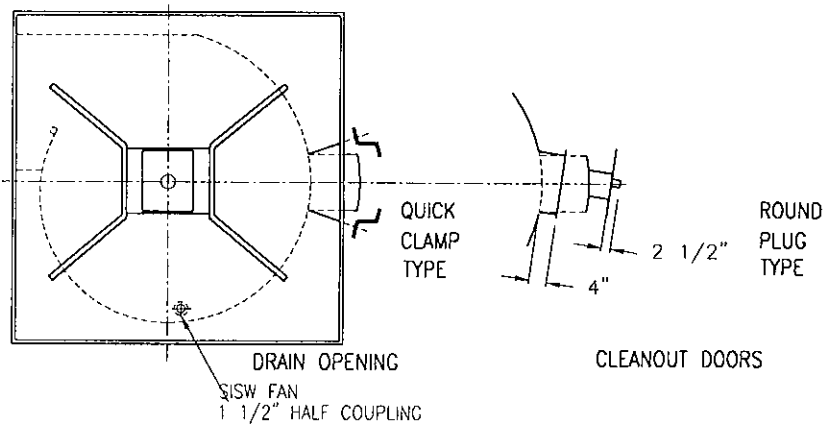

CLEANOUT DOORS

DRAIN OPENING IS LOCATED AT THE
LOWEST POINT ON THE SCROLL, ON THE FAN DRIVE SIDE

FAN SIZE	CLEANOUT DOOR	
	SIZE OPENING	
	CLAMP TYPE	PLUG TYPE
12 1/4	6 x 10	N/A
13 1/2	6 x 10	8
15	10 x 10	8
16 1/2	10 x 10	8
18 1/4	10 x 10	12
20	10 x 10	12
22 1/4	10 x 10	12
24 1/2	10 x 10	12
27	16 x 16	18
30	16 x 16	18
33	22 x 22	22
36 1/2	22 x 22	22
40 1/4	22 x 22	22
44 1/2	22 x 22	22

T.H. DISCHARGE AT 3:00 O'CLOCK
DOORS POSITION SHOWN
(C.C.W. ROTATION)


NOTES:

A. INLET FLANGES ARE FURNISHED PUNCHED AS
STANDARD.




SERIES 3000
ACCESSORIES
SHELDONS ENGINEERING

www.sheldonsengineering.com
sales@sheldonsengineering.com

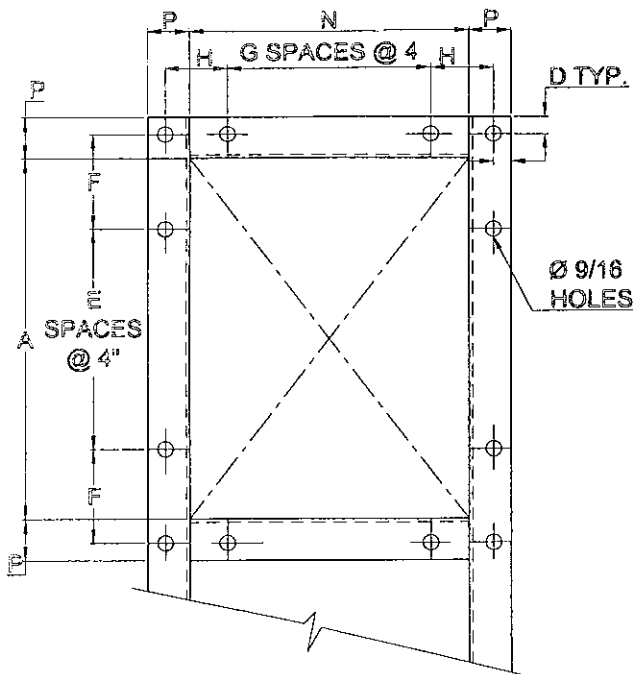

FLANGED OUTLET

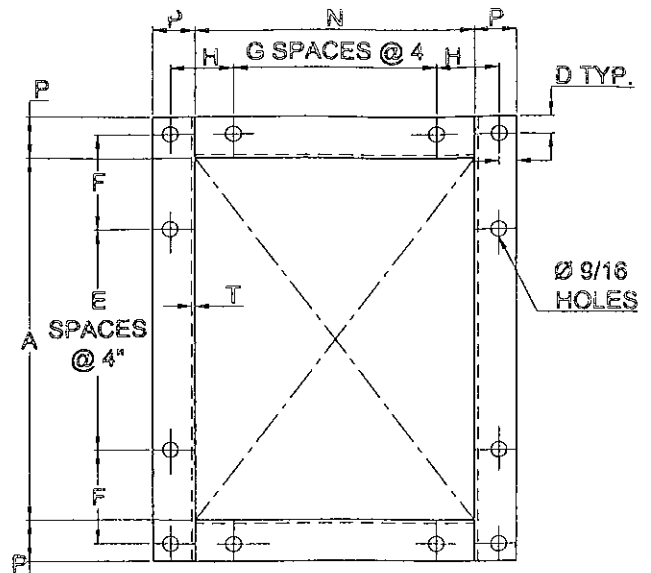

OUTLET COMPANION

FAN SIZE	FLANGED OUTLET DIMENSIONS								
	A	N	P	D	E	F	G	H	T
12 1/4	13 1/8	9 7/8	1 1/2	5/8	2	3 7/16	1	3 13/16	1/8
13 1/2	14 3/8	10 3/4	1 1/2	5/8	2	4 1/16	2	2 1/4	1/8
15	16	12	1 1/2	5/8	3	2 7/8	2	2 7/8	1/8
16 1/2	17 5/8	13 1/8	1 1/2	5/8	3	3 11/16	2	3 7/16	1/8
18 1/4	19 1/4	14 9/16	1 1/2	5/8	4	2 1/2	3	2 5/32	1/8
20	21 1/4	15 3/4	1 1/2	5/8	4	3 1/2	3	2 3/4	1/8
→ 22 1/4	23 5/8	17 5/8	2	5/8	5	2 11/16	3	3 11/16	1/8
24 1/2	26	19 3/8	2	5/8	5	3 7/8	4	2 9/16	1/8
27	28 5/8	21 1/4	2	7/8	6	3 7/16	5	1 3/4	1/8
30	32 3/4	23 1/4	2	7/8	7	3 1/2	5	2 3/4	3/16
33	36	25 1/2	2	7/8	8	3 1/8	6	1 7/8	3/16
36 1/2	39 3/4	28 1/4	2	7/8	9	3	6	3 1/4	3/16
40 1/4	42 1/16	32	2	7/8	10	2 5/32	7	3 1/8	3/16
44 1/2	46 5/8	35 1/4	2 1/2	1 1/8	11	2 11/16	8	3	1/4
49	53 1/8	38	2 1/2	1 1/8	12	3 15/16	9	2 3/8	1/4

SHELDONS ENGINEERING

www.sheldonsengineering.com
sales@sheldonsengineering.com

TITLE

SERIES 3000

FLANGED OUTLET