



Revisions		
Rev	Description	Approved



Cartridge Collector Outlet

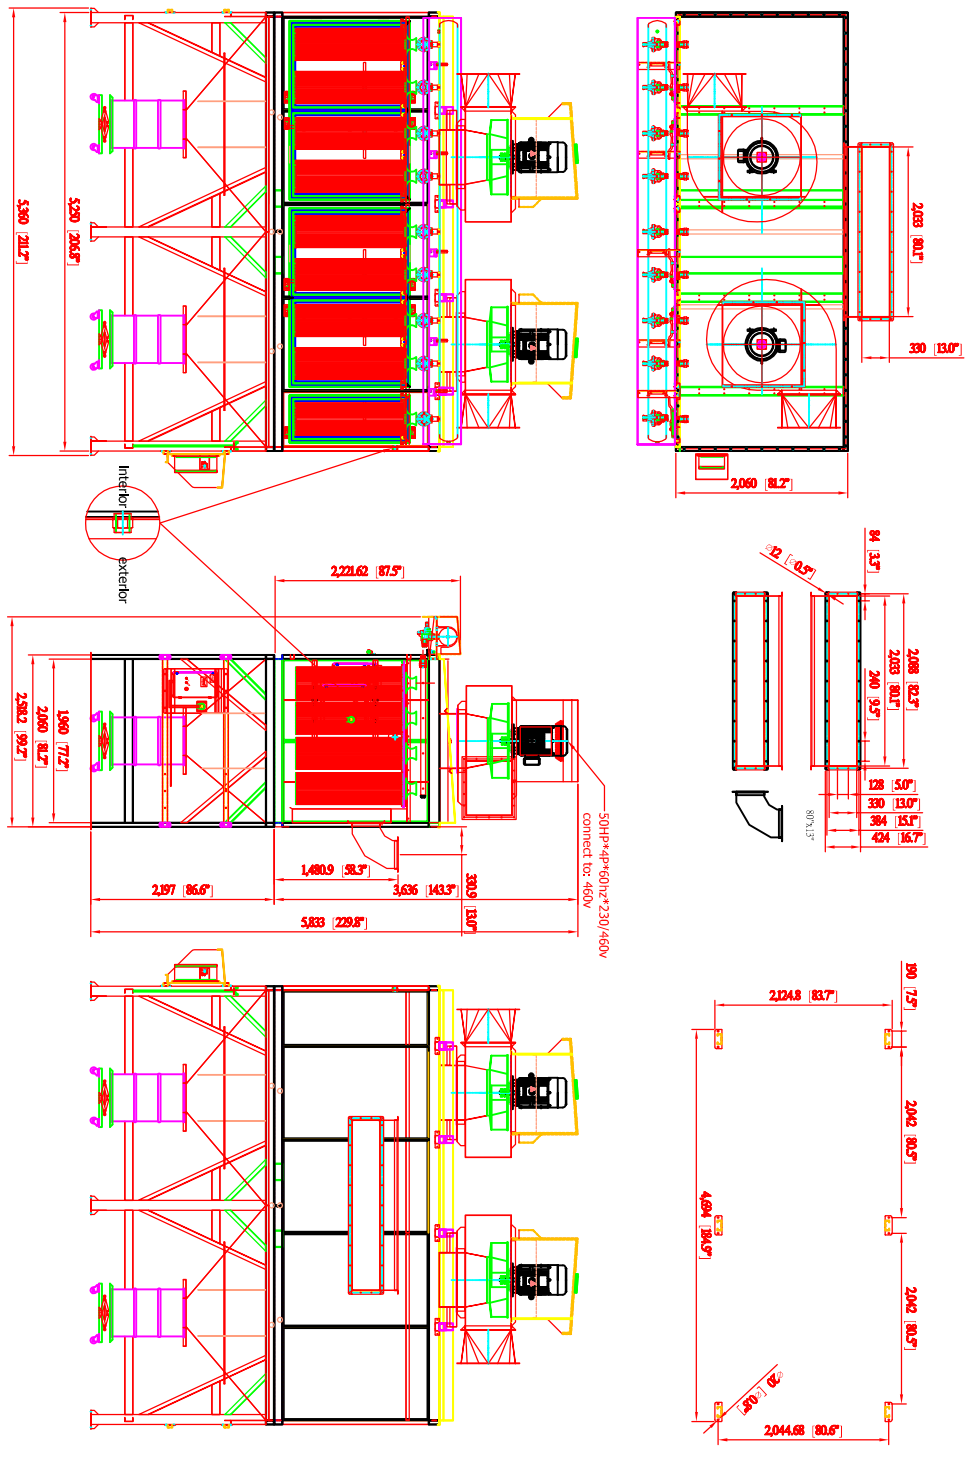

- SDC-50-36 SPECIFICATION -

- Direct Drive Blower (on the machine top)
- Motor: 50HP x 2 pc
- CFM: 20,000 f3/min
- Include:
 - UL Individual Control Boxes for Cartridge Collector and Blowers
- Inlet: 2033 x 330 mm (80" x 13")
- Cartridge Filter: Dia. 380mm x 1320mm x 36pcs (Dia. 15" x 52" x 36pcs)
- Material: Polyester with TEFLON coating.
- Filter Area: 19m² x 36 = 684m²
- Pleat Depth: 48mm
- Horizontal Positioned Filters,
- Continuous Welded Seams,
- Gasket and Latched Doors,
- Powder Coated Paint and Reverse Jet Pulse Cleaning
- Include:
 - Filter Chamber
 - Inlet Square Pipe (need dimensions)
 - No. of Valves: 9
 - Inlet Air: 3"
 - Compressed Air Requirement: 90 PSI
 - Compressed Air Reservoir: 31.6 gallon
 - Dimension: 161.4" x 81.8" x 144.6" (4096 x 2077 x 3670mm)
 - Construction: 13 Gauge for panel; 11 Gauge Steel Cabinet
 - Max. Operating Temp.: 120°C
 - Paint Color: Blue

AVANI ENVIRONMENTAL INTL. INC. Sales Department
 95 Cypress Drive
 Youngsville, NC 27596 info@avanienvironmental.com
 (919) 570-2862

Date	Name	Part Number:
2014-04-21	XXXXX	SDC-50-36
Checked by:		

Title:	Size	Scale	Drawing Number:
Cartridge Collector (drum type)	A	1 = 1	SVB-3600-01

The drawings, AutoCAD, 3-D Models, and specifications are the property of Avani Environmental Int'l, Inc. (AE) and may not be reproduced, distributed, modified, or otherwise used, except provided herein, without the express written permission of AE.