


Under normal operation.

- Video #1: steels attached to the hood to stimulate the total weight of the hood and dia. 24" hose at IOC's jobsite.
- if the hood runs into accidents to hit something and lopsided, the cable would not come out of the wheels.



- Video #2: hood hits the lowest point required and to right location, but the operator keeps pushing the down button. The hoist will stop automatically and have the alarm light flash.

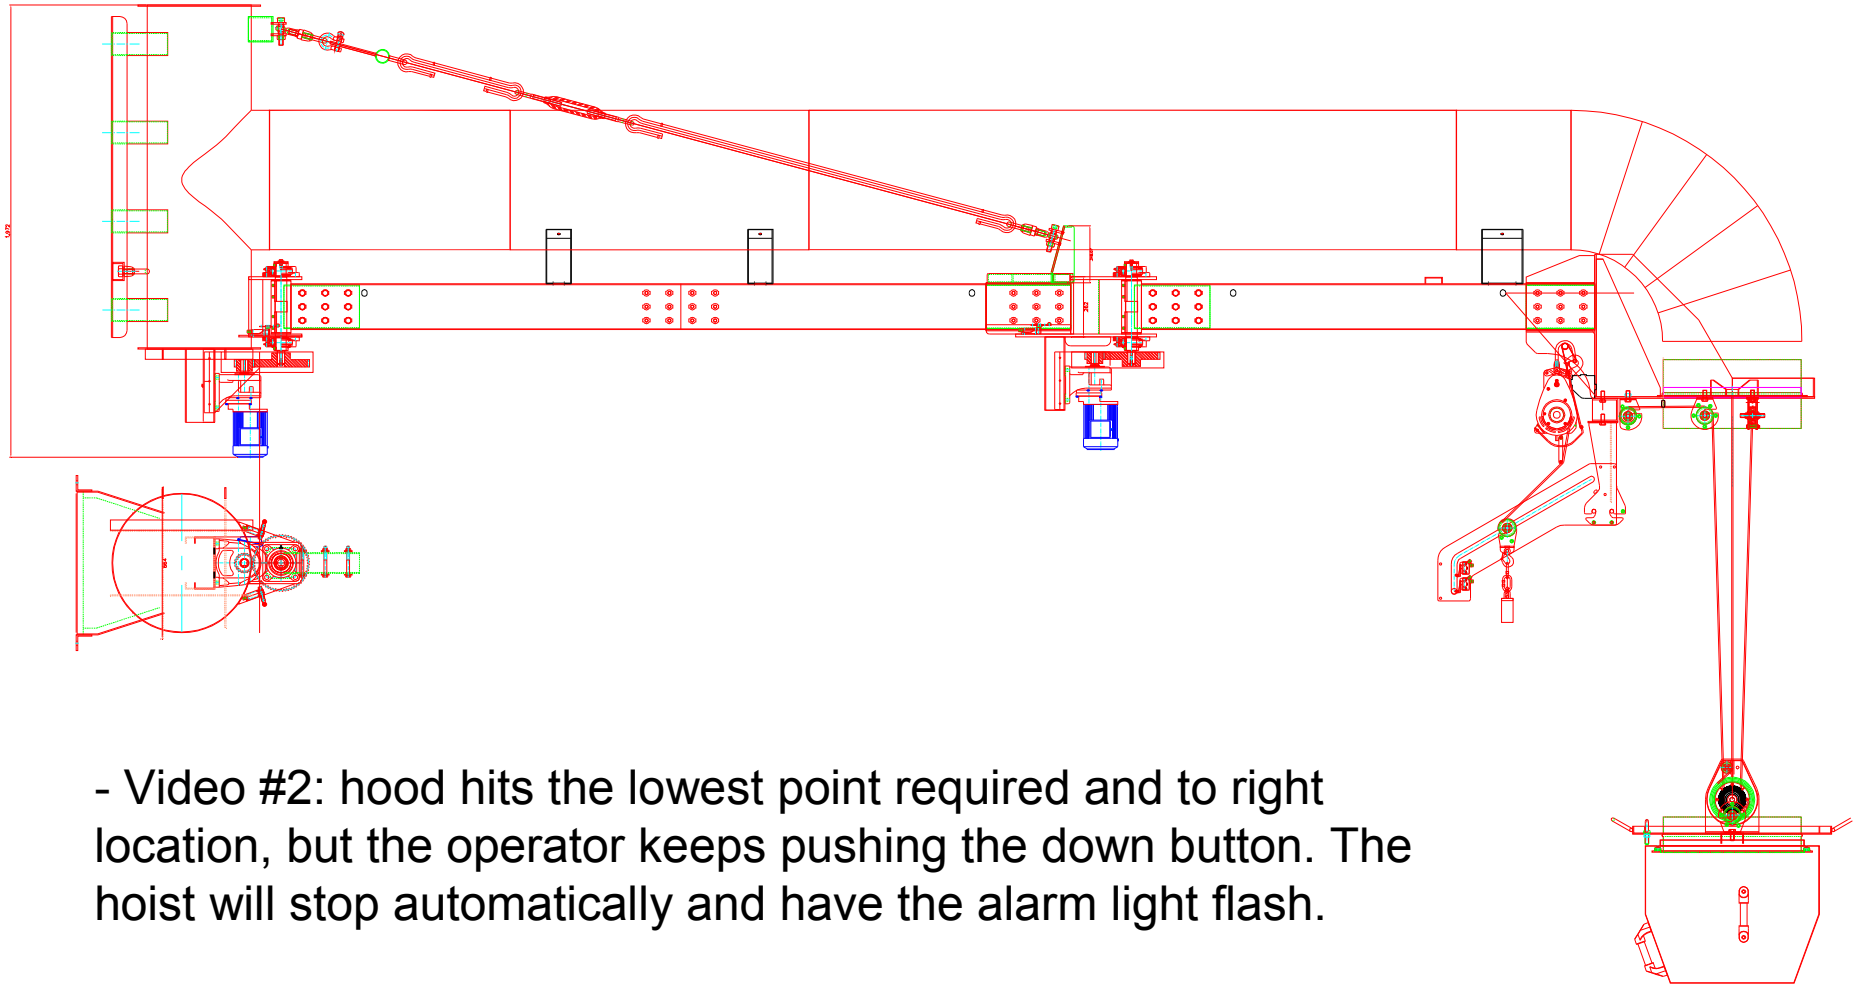