




# ECOMAXX™

## PNEUMATIC BLAST GATES – 24VDC

- ECOMAXX™ Pneumatic Blast Gates are available in the following diameters: 4", 5", 6", 7", 8", 10", 12", 14", 16", 18", 20", 22", 24", 26", 28", 30", & 32".
- Sizes 4" through 12" have one cylinder and Quick Connect 90 deg. flared ends.  
*P/N: EB-EM-ABG00 (00=Size)*
- Sizes 14" through 32" are reinforced and have two cylinders and flanged ends with co-flanges. *P/N EB-EM-ABG00HD (00=Size)*
- All ECOMAXX™ Gates have a 24VDC solenoid with LED indicator light.
- Sizes 4" through 12" diameter come standard with internal polyethylene gasket seals.
- Sizes 14" through 32" come standard with felt gasket in front and rubber on bottom to allow for self cleaning.
- Butterfly Style Dampers with dust seal are available *P/N: EB-EM-ABD00 (00=Size)*
- Standard construction is galvanized steel. Stainless Steel is available on request.

### ECOMAXX OPTIONS

- Connecting Ends for ECOMAXX™ Gates Sizes 4" thru 12". *P/N: EM-CE00 (00=Size)*
- Connection Clips for Sizes 4" thru 12". *P/N: EM-CL00 for standard clip with bolt,*

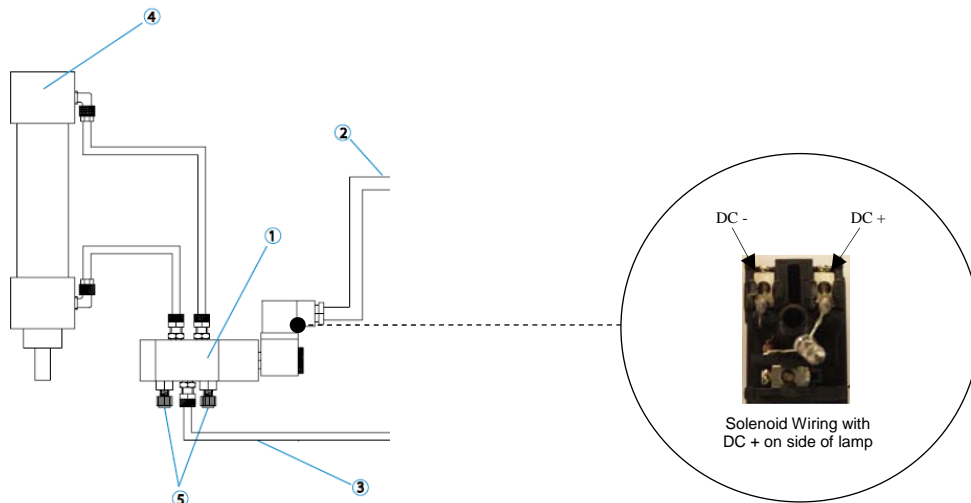

1) Solenoid Valve 2) Power Supply 3) Air Supply 4) Cylinder 5) Flux Regulators