



**DO NOT SCALE** **IF IN DOUBT ASK**






Rev	Description	Date	Approved

**Motor:** 5HP TEFC  
**Impeller:** Dia. 14-1/2" (Backward Incline)  
**Airflow:** 2500 CFM (4248 m3/hr)  
**Maximum Table Load:** 1764 pounds (lb)  
**FILTRATION STAGES:**  
 Aluminum Mesh: 12" x 11.2" x 0.86" (305 x 285 x 22mm) x 3PCS  
 Cartridge Filter Dia.: Dia. 8.46" x 13"L (Dia. 215 x 330mmL) x 6PCS  
 Cartridge Filter Area: 15 M2 (161.5 FT2)  
 Polyester Spun Bond: Polyester with TEFLOn treatment & coating  
 Air-to-Cloth Spun Bond: 15.48  
 Air-to-Cloth 80/20 FR: 7.88 (OPTIONAL FILTER MEDIA)  
**No. of Valves:** 2  
**Compressed Air Requirement:** 90 PSI  
**Compressed Air Reservoir:** 2.88 gallon  
**Construction:** 16 gauge steel (1.6mm)  
**Max. Operating Temp.:** 120° C  
**Paint Color:** Blue

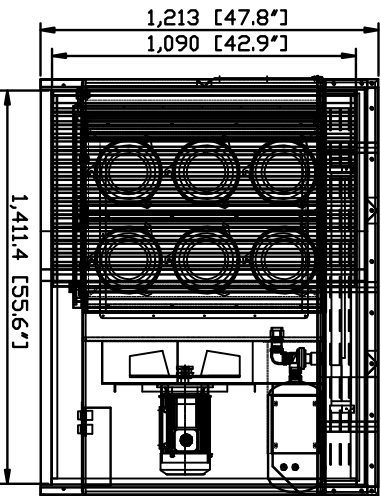

**Optional Accessories:**  
 - Oskar 6" Fume Arm  
 - Backdraft Module  
 - Whole Assembly  
 Side Wall  
 Back Wall  
 - HEPA Filter  
 - Working Light  
 - Tooling Rack

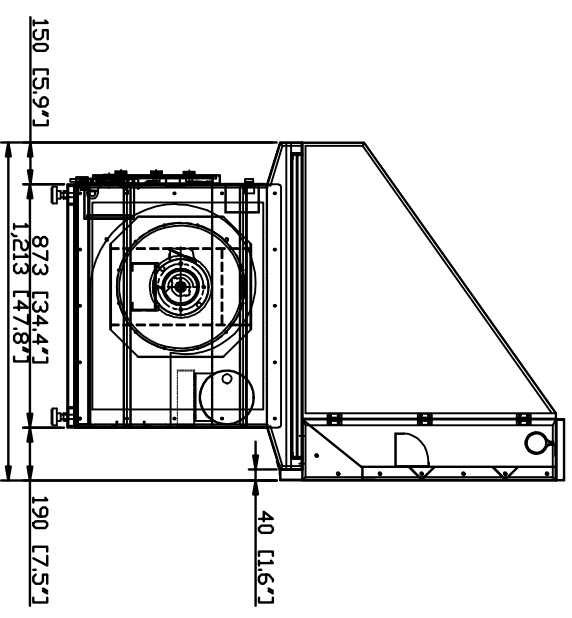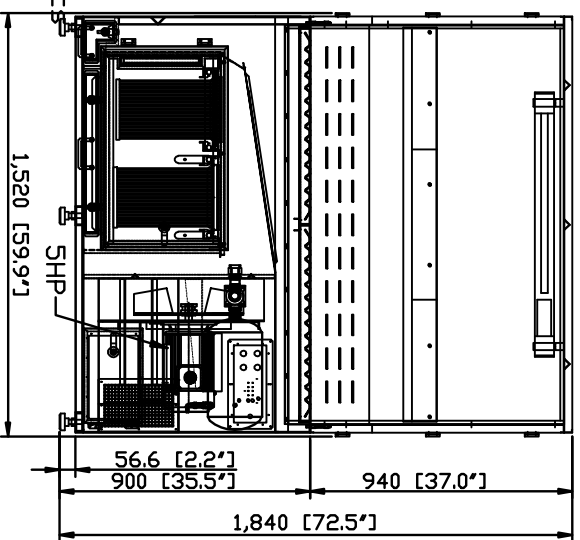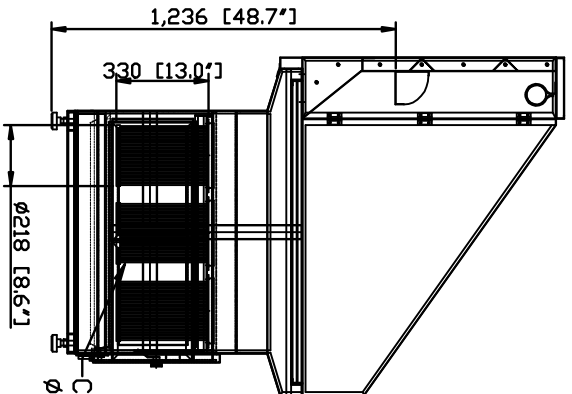

**Avant Environmental Intd. Inc.**      **Sales Department**  
 95 Cypress Drive      (919) 570-2862  
 Youngsville, NC 27596      sales@avantenvironmental.com

Date	Name	Part Number:	Title:
XX-XX-XX	XXXXX	<b>SDT-5 (SHP)</b>	<b>Downdraft Table Standard SDT-5</b>

This drawing is confidential and is the exclusive property of Oskar Air Products. No unauthorized use/copy or disclosure is to be made and it is returned whenever required.  
**Size A**      **Scale 1 = 1**      **Drawing Number: FE-6000S-020501**