


DO NOT SCALE

IF IN DOUBT ASK



Revisions			
Rev	Description	Date	Approved

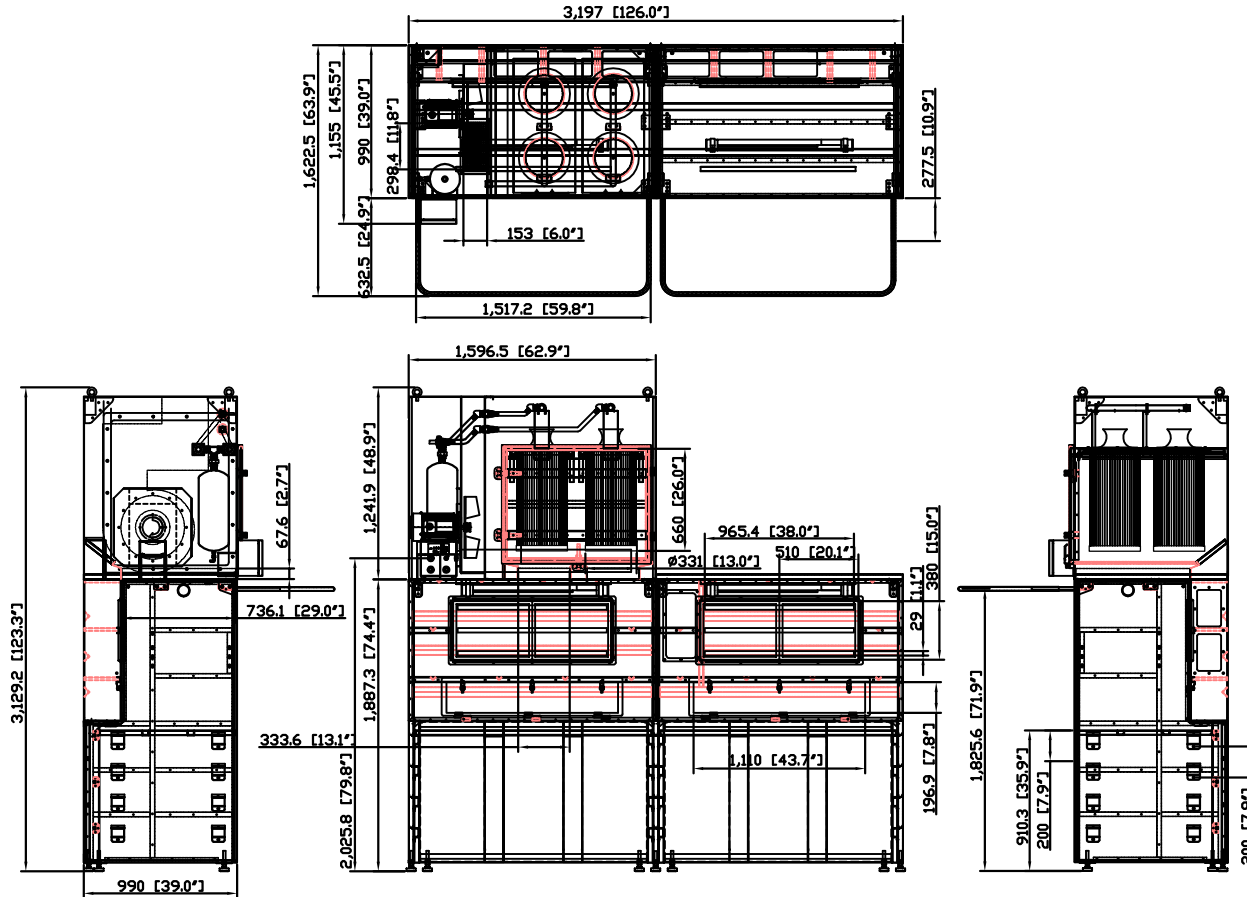

WB-3000 SPECIFICATIONS	
Motor:	5 HP TEFC
Airflow:	2000 ft ³ /min 3396 m ³ /hr
Filtration Stages:	1st - aluminum mesh x (2) pcs per station Spec: 20" x 15" x 1" 2nd - cartridge filter x (4) pcs Spec: Dia. 325 x 660mmL (12.8" x 26"L) Filtering area: 10M2 x 4 = 40M2 (430.4 FT ²)
Polyester Spun bond:	Polyester with TEFLON treatment & coating
No. of Valves:	2
Compressed Air Requirement:	90 PSI
Compressed Air Reservoir:	3.58 gallon
Outlet Opening:	11.8" x 6"
Dimension:	319.7 x 162.3 x 312.9 cm (126 x 63.9 x 123.3 inch)
Construction:	14 gauge steel / 1.897 mm
Max. Operating Temp.:	120°C
Paint Color:	Blue
Control Box:	- UL Control Panel
Booth Apparatus:	*** Back Draft Inlet Slots: Unadjustable (3) 1" x 38" per station *** Non-Recessed Lights: (1) Explosion Proof Lights (110V, Single Phase, 60 Hz, 20W) per station *** Adjustable Rear Shelf (1) per station

AVANI ENVIRONMENTAL, INC.
95 Cypress Drive
Youngsville, NC 27596

Sales Department
(919) 570-2862
sales@oskarsales.com

Drawn by:	Date	Name	Part Number:	Title:
Checked by:	2010-10-11	***	**	WB-3000
This drawing is confidential and is the exclusive property of Avani Environmental. No unauthorized use/copy or disclosure is to be made and it is returned whenever required.				Drawing Number:

Size
A

Scale
1 = 35

Drawing Number:
